



川源（中国）机械有限公司
GSD Industrial Co.,Ltd.

ISA

单级单吸暖通空调系统循环泵

ISA single-stage single-suction circulating pump for air-condition



ISA 单级单吸暖通空调系统循环泵

ISA single-stage single-suction circulating pump for air-condition

简介

- ISA型暖通空调系统循环泵系我公司根据供暖空调冷热水循环系统的特殊需要，采用先进设计技术自行开发研制的，该型泵浦具有高效率、低噪音、运转平稳、可靠、承压能力高、结构新颖、检修方便等显著特点。
- ISA型暖通空调系统循环泵型谱分档合理，能保证系统所需运行工况在泵浦的高效区范围；国内外首创的结构设计，使泵浦的安装和进出口法兰布置极其灵活；优良的材料和可靠的设计，使泵能满足高层和超高层建筑循环水系统的静压要求。

用途

- 空调制冷系统冷却水循环。
- 高层建筑和住宅小区采暖，供热锅炉或热交换器水循环。
- 冶金、热力站、纺织、制糖、化工、制药、余热利用等生产工艺流程封闭回路系统水循环。
- 有机热交换介质的输送。

特点

- ISA型泵浦为单级单吸双端支承式新型离心泵，泵浦轴向总长度比传统的单级泵显著缩短，以利于提高运转平稳性，降低噪音。
- 泵浦采用特殊结构设计，使同一规格的泵浦具有立式或卧式安装，径向或轴向吸入介质，进出口法兰方向可调的十六种不同装配形式，以充分满足供暖空调循环系统现场管路的不同安装要求。
- 泵浦采用后开门结构设计，维修时勿需拆卸管路，打开泵盖即可取出转子。

轴封

ISA型泵浦采用优质机械密封，具有最佳的密封效果和较长的使用寿命。

轴承和平衡

- 泵浦传动端采用角接触球轴承，用润滑脂润滑；另一端采用滑动轴承，用输送介质润滑。
- 泵浦的轴向力由叶轮背密封环和平衡，残余轴向力由滚动轴承承受。

传动

泵浦通过弹性柱销联轴器与电机直联传动，从电机端看，泵浦为逆时针方向旋转。



Introduction

- ISA pump is designed by our company according to the special requirement of air condition circulating system, ISA pump has such outstanding features as high efficient, low noise, available operating, etc.
- ISA pump has good and proper performance and is the first kind of construction design in our country, so it is easy to install. The fine material and reliable design ensure to content the still-voltage requirement of high and beyond-high building water supplying.

Application

- Cooling water circulating system for air-condition.
- Heating of high-rise buildings and residential area, water circulating of heating boiler or heat exchanger.
- Water circulating in production process of metallurgy, heating power station, textile, sugar, chemical industries, pharmacy, waste heat utilisation, etc.
- Organic exchange of transmission medium.

Features

- ISA pump is single-stage, single-suction centrifugal pump. The rotor is sported by two ends. Owing to advanced design technique, the same specification has horizontal and vertical installing type, journal and axial suction.
- The total length of axial is shorter than traditional single-stage pump, this design can improve the smooth operation and reduce noise.
- The pumps using the back of the open structure, open the pump cover can remove the rotor without dismantling the pipeline.

Shaft seal

Mechanical seal is used in ISA pump.

Bearing and balance

- Thrust angular contact ball bearings are used at the drive end of the shaft, lubricated with grease. Plain bearing is used at the other side of the shaft, lubricated with the process liquid.
- The most axial force of the impeller is balanced through drilling the holes on it, and the residual axial force is borne by the rolling ball bearings.

Drive

Pump is driven by motor through pin coupling. The direction of rotation is counter-clockwise viewed from motor.

适用条件

进口压力：P≤1.6MPa
运行温度：t=0~130℃
工作方式：连续运行

Condition of usage

Suction pressure: P≤1.6MPa
Temperature of medium: t=0~130℃
Work method: Continuous operation

型号说明 Type description

ISA - 100 - 80 - 20 - O

"O"表示原型，即叶轮外径未经过切割，没有标注"O"表示叶轮经过切割
"O" means impeller not been trimmed, not marked means the original impeller has been trimmed


额定扬程
Rated head (m)

额定流量
Rated Capacity (m³/h)

进口直径
Suction diameter (mm)

ISA单级单吸空调系统循环泵
ISA Single-stage single-suction circulating pump for air-condition


结构简图及材质 Construction and material

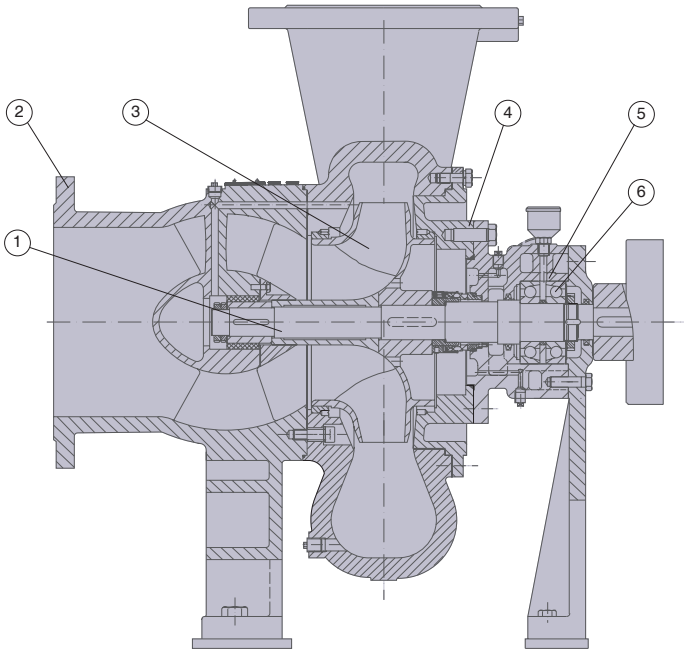

NO.	名称 Name	材质 Material	
		GB	JIS
1	轴 Shaft	3Cr13	SUS420J2
2	进水体 Suction box	HT250	FC250
3	叶轮 Impeller	HT250	FC250
4	泵体 Pump casing	HT250	FC250
5	轴承体 Bearing body	HT250	FC250
6	轴承 Bearing	GCr15	SUJ2


泵安装型式图

Drawing of ISA pumps installation

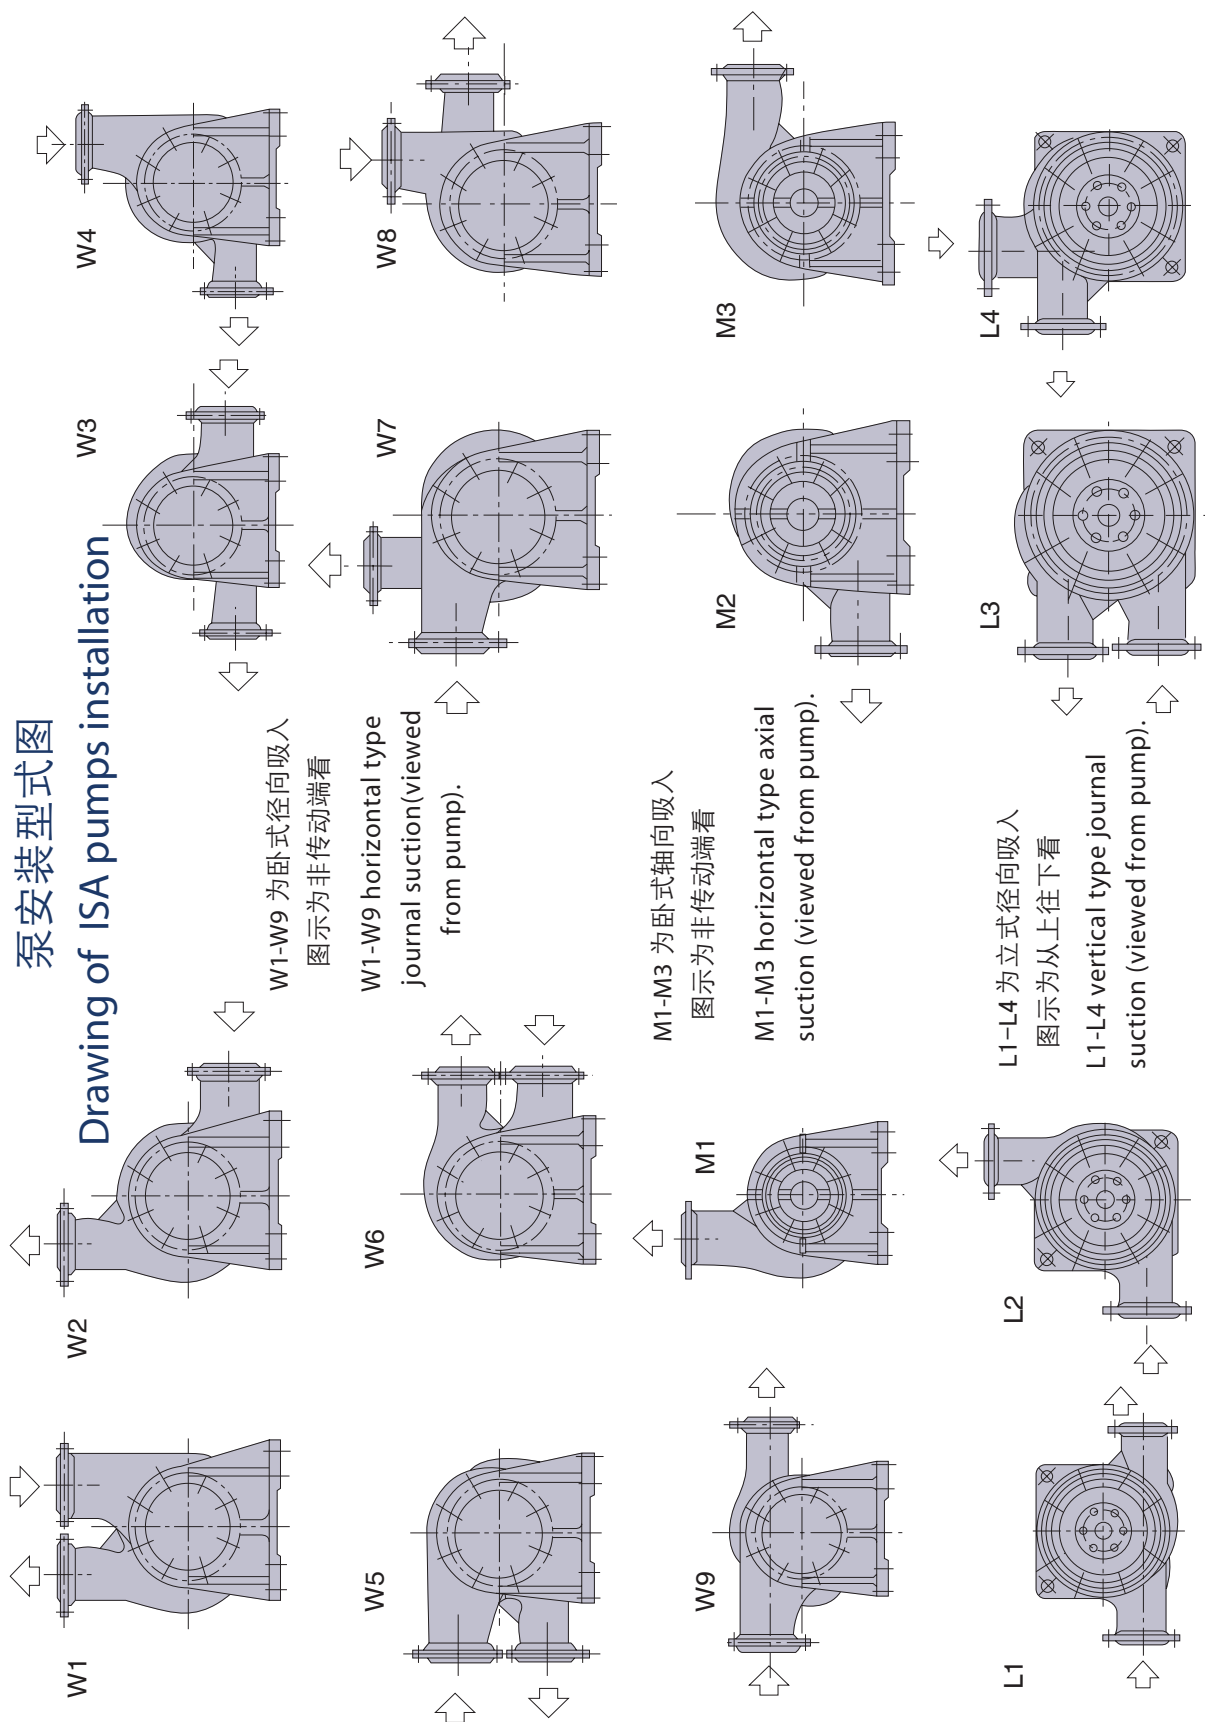

泵性能范围图

Performance range of ISA pumps

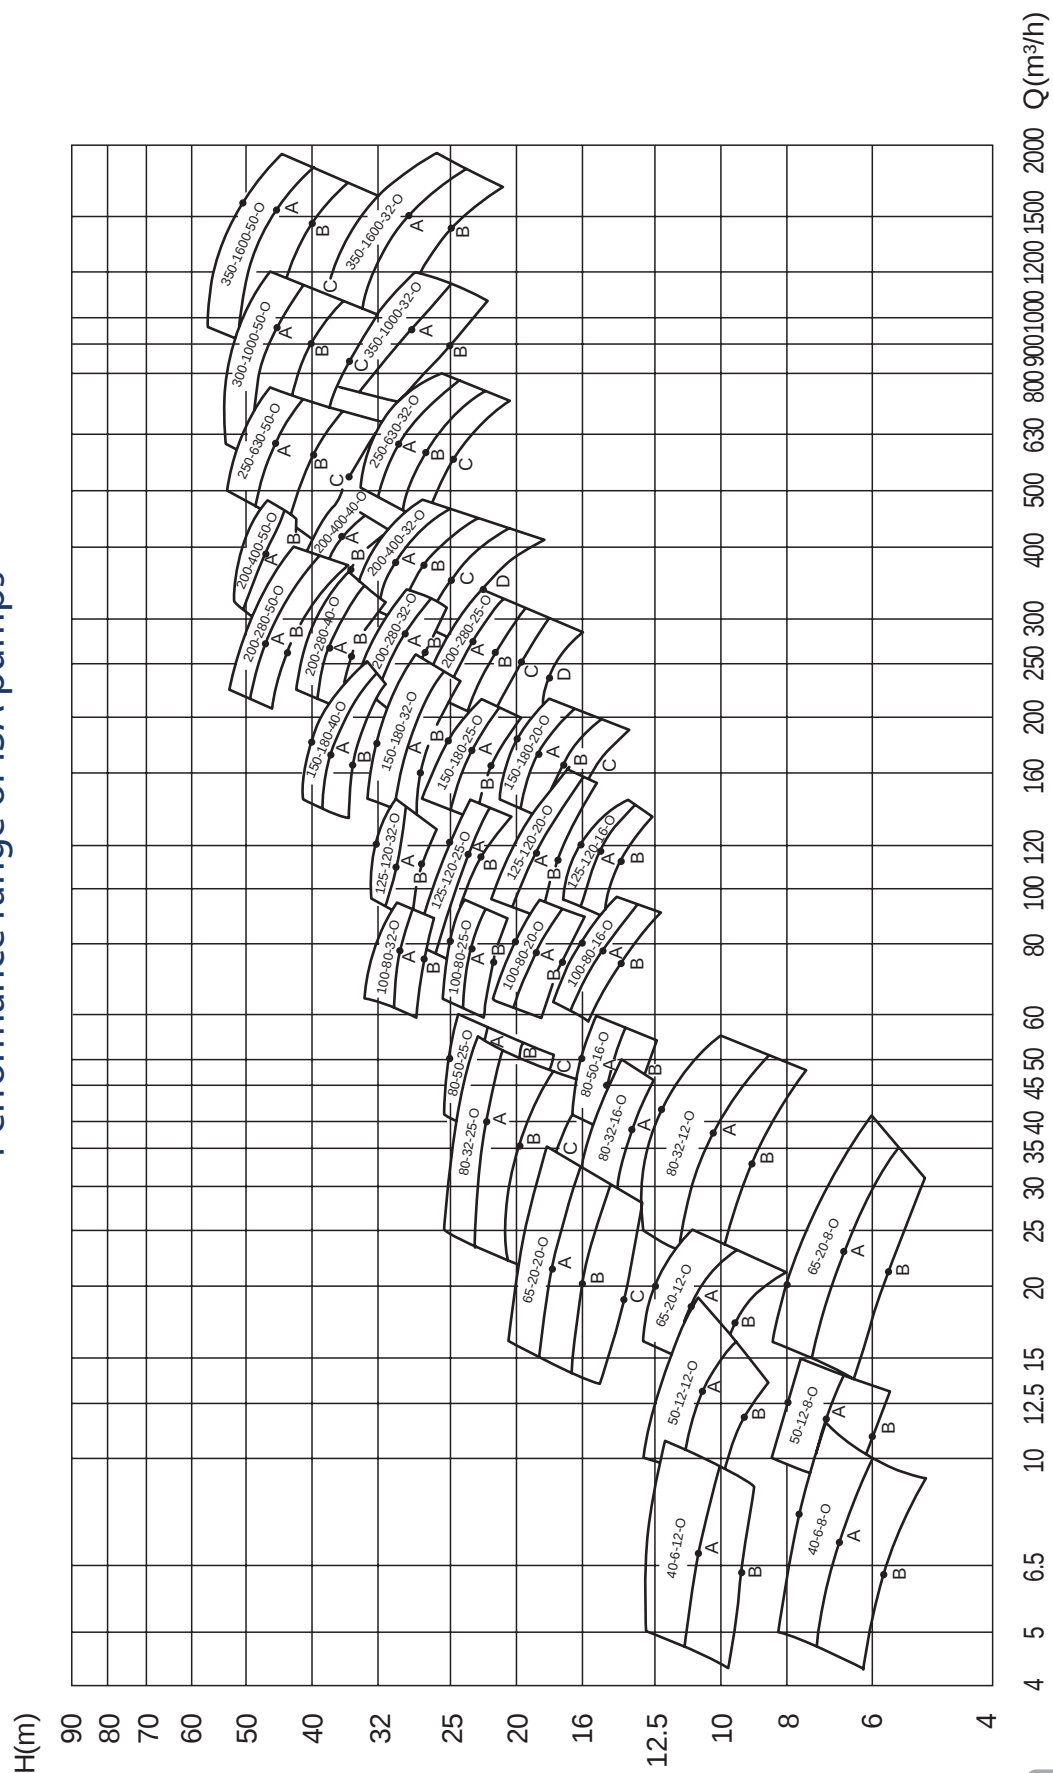

性能参数 Performance parameters

型号 Type	流量 Capacity (m³/h)	扬程 Head (m)	转速 Speed (r/min)	功率 Power		效率 Eff. (%)	必须气蚀余量 NPSHr (m)	泵口径 进/出 Impeller Dia. Suction/Discharge (mm)	泵整机重量 Weight of pump (kg)		
				轴功率 Shaft power	电机功率 Motor power				W布置	M布置	L布置
ISA40-6-8-O	5.0	8.25	1450	0.26	0.55	43	3.0	40/32	109	104	77.5
	6.3	8	1450	0.3	0.55	46	3.0	40/32	109	104	77.5
	11.5	7	1450	0.41	0.55	53	3.0	40/32	109	104	77.5
-6-7	4.7	7.25	1450	0.23	0.55	40	3.0	40/32	109	104	77.5
	5.9	7	1450	0.26	0.55	44	3.0	40/32	109	104	77.5
	10.0	6	1450	0.34	0.55	48	3.0	40/32	109	104	77.5
-5-6	4.3	6.2	1450	0.19	0.55	39	3.0	40/32	109	104	77.5
	5.4	6	1450	0.21	0.55	42	3.0	40/32	109	104	77.5
	9.2	5	1450	0.29	0.55	44	3.0	40/32	109	104	77.5
ISA40-6-12-O	5.0	12.9	1450	0.44	0.75	40	3.1	40/32	117	113	84
	6.3	12.5	1450	0.50	0.75	43	3.1	40/32	117	113	84
	9.5	12.3	1450	0.65	0.75	49	3.1	40/32	117	113	84
-6-11	4.7	11.3	1450	0.40	0.75	36	3.1	40/32	117	113	84
	5.9	11	1450	0.45	0.75	39	3.1	40/32	117	113	84
	9.7	10	1450	0.56	0.75	47	3.1	40/32	117	113	84
-6-9	4.3	9.75	1450	0.34	0.55	34	3.1	40/32	116	112	83
	5.4	9.5	1450	0.39	0.55	36	3.1	40/32	116	112	83
	6.5	9	1450	0.42	0.55	38	3.1	40/32	116	112	83
ISA50-12-8-O	10	8.4	1450	0.43	1.1	53	3.1	50/40	115	109	80
	12.5	8	1450	0.47	1.1	58	3.1	50/40	115	109	80
	15	7.6	1450	0.54	1.1	58	3.1	50/40	115	109	80
-12-7	9.4	7.35	1450	0.37	0.75	51.4	3.1	50/40	112	106	77
	11.7	7	1450	0.40	0.75	56	3.1	50/40	112	106	77
	14	6.6	1450	0.45	0.75	56	3.1	50/40	112	106	77
-11-6	8.7	6.35	1450	0.30	0.55	49.6	3.1	50/40	111	105	76
	10.9	6	1450	0.33	0.55	54	3.1	50/40	111	105	76
	13.1	5.65	1450	0.37	0.55	54	3.1	50/40	111	105	76
ISA50-12-12-O	10	13	1450	0.72	1.5	49	3.3	50/40	123	117	88
	12.5	12.5	1450	0.82	1.5	52	3.3	50/40	123	117	88
	19	10.8	1450	1.10	1.5	51	3.3	50/40	123	117	88
-12-11	9.4	11.3	1450	0.62	1.1	47	3.3	50/40	118	112	83
	11.7	11	1450	0.70	1.1	50	3.3	50/40	118	112	83
	16	9.5	1450	0.84	1.1	49	3.3	50/40	118	112	83
-11-9	8.7	10	1450	0.53	0.75	45	3.3	50/40	115	109	80
	10.9	9.5	1450	0.59	0.75	48	3.3	50/40	115	109	80
	13.1	8.7	1450	0.66	0.75	47	3.3	50/40	115	109	80
ISA65-20-8-O	16	8.4	1450	0.61	1.5	60	3.3	65/50	129	122	95
	20	8	1450	0.68	1.5	64	3.3	65/50	129	122	95
	30	6	1450	0.83	1.5	59	3.3	65/50	129	122	95
-19-7	15	7.35	1450	0.52	1.1	58	3.3	65/50	124	117	90
	18.7	7	1450	0.58	1.1	62	3.3	65/50	124	117	90
	28	5	1450	0.67	1.1	57	3.3	65/50	124	117	90
-17-6	13.8	6.35	1450	0.43	1.1	56	3.3	65/50	124	117	90
	17.3	6	1450	0.47	1.1	60	3.3	65/50	124	117	90
	26	4	1450	0.69	1.1	62	3.3	65/50	124	117	90
ISA65-20-12-O	16	13	1450	1.05	2.2	54	3.3	65/50	143	136	115
	20	12.5	1450	1.15	2.2	59	3.3	65/50	143	136	115
	25	11	1450	1.34	2.2	56	3.3	65/50	143	136	115
-19-11	15	11.5	1450	0.90	1.5	52	3.3	65/50	136	129	107
	18.7	11	1450	0.95	1.5	57	3.3	65/50	136	129	107
	23	9.5	1450	1.10	1.5	54	3.3	65/50	136	129	107
-17-9	14	10	1450	0.76	1.5	50	3.3	65/50	136	129	107
	17.3	9.5	1450	0.80	1.5	55	3.3	65/50	136	129	107
	22	8	1450	0.92	1.5	52	3.3	65/50	136	129	107
ISA65-20-20-O	16	20.5	1450	1.86	4	48	3.3	65/50	186	176	128
	20	20	1450	2.06	4	53	3.3	65/50	186	176	128
	35	18	1450	3.18	4	54	3.3	65/50	186	176	128
-19-18	15	18.5	1450	1.64	3	46	3.3	65/50	181	171	123
	19	18	1450	1.83	3	51	3.3	65/50	181	171	123
	33	16	1450	2.77	3	52	3.3	65/50	181	171	123
-18-16	14	16.5	1450	1.4	3	45	3.3	65/50	181	171	123
	18	16.2	1450	1.6	3	49	3.3	65/50	181	171	123
	30	14.5	1450	2.4	3	50	3.3	65/50	181	171	123
-17-14	13.5	15	1450	1.3	2.2	43	3.3	65/50	177	167	119
	17	14.2	1450	1.4	2.2	47	3.3	65/50	177	167	119
	28	13	1450	2.1	2.2	48	3.3	65/50	177	167	119



性能参数 Performance parameters

型号 Type	流量 Capacity (m³/h)	扬程 Head (m)	转速 Speed (r/min)	功率 Power		效率 Eff. (%)	必须气蚀余量 NPSHr (m)	泵口径 进/出 Impeller Dia. Suction/Discharge (mm)	泵整机重量 Weight of pump (kg)		
				轴功率 Shaft power	电机功率 Motor power				W布置	M布置	L布置
ISA80-32-12-O	25	13	1450	1.5	3	60	3.4	80/65	232	224	174
	32	12.5	1450	1.6	3	65	3.4	80/65	232	224	174
	55	10	1450	2.3	3	64	3.4	80/65	232	224	174
-30-11	23	11.5	1450	1.2	2.2	58	3.4	80/65	229	221	171
	30	11	1450	1.4	2.2	63	3.4	80/65	229	221	171
	51	8.5	1450	1.9	2.2	62	3.4	80/65	229	221	171
-28-9	22	10	1450	1.1	2.2	56	3.4	80/65	229	221	171
	27.8	9.5	1450	1.2	2.2	61	3.4	80/65	229	221	171
	48	7.5	1450	1.6	2.2	60	3.4	80/65	229	221	171
ISA80-32-16-O	25	16.5	1450	2.0	3	57	3.4	80/65	252	248	192
	32	16	1450	2.3	3	62	3.4	80/65	252	248	192
	50	14	1450	2.9	3	67	3.4	80/65	252	248	192
-30-14	23	14.5	1450	1.7	3	55	3.4	80/65	252	248	192
	30	14.2	1450	1.9	3	60	3.4	80/65	252	248	192
	46	12.5	1450	2.4	3	65	3.4	80/65	252	248	192
ISA80-32-25-O	25	25.5	1450	3.1	5.5	56	3.4	80/65	332	335	240
	32	25	1450	3.52	5.5	62	3.4	80/65	332	335	240
	72	21	1450	5.4	5.5	77	3.4	80/65	332	335	240
-30-23	23	23	1450	2.4	5.5	59	3.4	80/65	332	335	240
	30.5	22.7	1450	3.04	5.5	62	3.4	80/65	332	335	240
	51	21	1450	3.8	5.5	77	3.4	80/65	332	335	240
-29-20	22	20.5	1450	2.3	4	53	3.4	80/65	304	307	221
	28.9	20.5	1450	2.83	4	57	3.4	80/65	304	307	221
	48	17.5	1450	3.6	4	63	3.4	80/65	304	307	221
-27-18	21	18	1450	2.2	4	47	3.5	80/65	304	307	221
	27.3	18.2	1450	2.42	4	51	3.5	80/65	304	307	221
	45	15.5	1450	3.5	4	56	3.5	80/65	304	307	221
ISA80-50-16-O	40	16.5	1450	2.9	4	61.5	3.5	80/65	258	254	198
	50	16	1450	3.2	4	68	3.5	80/65	258	254	198
	60	15.3	1450	3.6	4	69	3.5	80/65	258	254	198
-48-14	38	15	1450	2.6	4	59.8	3.5	80/65	258	254	198
	47.5	14.5	1450	2.8	4	66	3.5	80/65	258	254	198
	57	13.8	1450	3.2	4	66.9	3.5	80/65	258	254	198
-45-13	36	13.5	1450	2.3	3	58.1	3.5	80/65	252	248	192
	45	13	1450	2.5	3	64	3.5	80/65	252	248	192
	54	12.4	1450	2.8	3	64.9	3.5	80/65	252	248	192
ISA80-50-25-O	40	25.5	1450	4.9	7.5	56.5	3.5	80/65	345	348	253
	50	25	1450	5.4	7.5	63	3.5	80/65	345	348	253
	60	24.3	1450	6.2	7.5	64	3.5	80/65	345	348	253
-47-23	38	23.2	1450	4.4	7.5	54.8	3.5	80/65	345	348	253
	47.5	22.7	1450	4.8	7.5	61	3.5	80/65	345	348	253
	57	22	1450	5.5	7.5	61.9	3.5	80/65	345	348	253
-45-20	36	21	1450	3.8	5.5	53.1	3.5	80/65	332	335	240
	45	20.5	1450	4.3	5.5	59	3.5	80/65	332	335	240
	54	19.9	1450	4.9	5.5	59.9	3.5	80/65	332	335	240
-42-18	34	18.6	1450	3.3	5.5	51.5	3.5	80/65	332	335	240
	42.5	18.2	1450	3.7	5.5	57	3.5	80/65	332	335	240
	51	17.6	1450	4.2	5.5	57.8	3.5	80/65	332	335	240
ISA80-50-32-O	40	33.3	1450	6.12	11	62	3.5	80/65	-	-	-
	50	32	1450	6.65	11	65	3.5	80/65	-	-	-
	60	28.8	1450	7	11	67.5	3.5	80/65	-	-	-
ISA100-80-16-O	63	17.6	1450	4.3	7.5	71	3.6	100/80	419	395	283
	80	16	1450	4.8	7.5	73	3.6	100/80	419	395	283
	97	14.2	1450	5.5	7.5	69	3.6	100/80	419	395	283
-77-15	61	16.6	1450	4.0	5.5	69	3.6	100/80	419	395	283
	77	15	1450	4.4	5.5	71	3.6	100/80	419	395	283
	94	13.2	1450	5.0	5.5	67	3.6	100/80	419	395	283
-74-14	58.3	15.6	1450	3.6	5.5	68	3.7	100/80	419	382	270
	74	14	1450	4.0	5.5	70	3.7	100/80	406	382	270
	91	12.2	1450	4.6	5.5	66	3.7	100/80	406	382	270
ISA100-80-20-O	64	21.6	1450	5.6	7.5	67	3.7	100/80	406	400	306
	80	20	1450	6.1	7.5	72	3.7	100/80	427	400	306
	96	18.4	1450	6.7	7.5	72	3.7	100/80	427	400	306
-77-19	61.6	20.1	1450	5.0	7.5	66.6	3.7	100/80	427	400	306
	77	18.7	1450	5.6	7.5	70	3.7	100/80	427	400	306
	92.4	17	1450	6.2	7.5	69.3	3.7	100/80	427	400	306



性能参数 Performance parameters

型号 Type	流量 Capacity (m³/h)	扬程 Head (m)	转速 Speed (r/min)	功率 Power		效率 Eff. (%)	必须气蚀余量 NPSHr (m)	泵口径 进/出 Impeller Dia. Suction/Discharge (mm)	泵整机重量 Weight of pump (kg)		
				轴功率 Shaft power	电机功率 Motor power				W布置	M布置	L布置
-74-17	59.2	18.3	1450	4.5	5.5	65	3.7	100/80	414	386	293
	74	17.1	1450	5.1	5.5	68	3.7	100/80	414	386	293
	85	16.1	1450	5.5	5.5	68.2	3.7	100/80	414	386	293
ISA100-80-25-O	64	25.6	1450	6.9	11	64.8	3.7	100/80	482	449	330
	80	25	1450	7.8	11	70	3.7	100/80	482	449	330
	96	23.8	1450	8.8	11	70.8	3.7	100/80	482	449	330
-77-23	61.6	23.9	1450	6.4	11	63	3.8	100/80	482	449	330
	77	23.3	1450	7.2	11	68	3.8	100/80	482	449	330
	92.4	22.1	1450	8.1	11	68.8	3.8	100/80	482	449	330
-74-22	59.2	22.2	1450	5.9	11	61.2	3.8	100/80	482	449	330
	74	21.6	1450	6.6	11	66	3.8	100/80	482	449	330
	88.8	20.5	1450	7.4	11	66.7	3.8	100/80	482	449	330
ISA100-80-32-O	64	33.3	1450	9.5	15	61	3.8	100/80	600	535	415
	80	32	1450	10.4	15	67	3.8	100/80	600	535	415
	100	28.8	1450	12.1	15	65	3.8	100/80	600	535	415
-77-30	61.6	30.2	1450	8.6	15	59.2	3.8	100/80	600	535	415
	77	29.6	1450	9.6	15	65	3.8	100/80	600	535	415
	92.4	28.4	1450	10.9	15	65.8	3.8	100/80	600	535	415
-74-27	59.2	27.9	1450	7.8	11	57.5	3.8	100/80	579	514	394
	74	27.3	1450	8.7	11	63	3.8	100/80	579	514	394
	88.8	26.2	1450	10.0	11	63.7	3.8	100/80	579	514	394
ISA125-120-16-O	95.8	17	1450	6.3	7.5	70	3.8	125/100	490	454	344
	120	16	1450	6.8	7.5	77	3.8	125/100	490	454	344
	144	13.6	1450	7.2	7.5	74	3.8	125/100	490	454	344
-116-15	93	15.9	1450	5.9	7.5	68	3.8	125/100	490	454	344
	116	15	1450	6.3	7.5	75	3.8	125/100	490	454	344
	139	13.5	1450	7.1	7.5	72	3.8	125/100	490	454	344
-112-14	89.6	14.8	1450	5.5	7.5	66	3.8	125/100	445	410	300
	112	14	1450	5.9	7.5	73	3.8	125/100	445	410	300
	134.4	12.5	1450	6.5	7.5	70	3.8	125/100	445	410	300
ISA125-120-20-O	96	21.7	1450	7.8	11	72.3	3.8	125/100	509	473	385
	120	20	1450	8.7	11	75	3.8	125/100	509	473	385
	169	16.2	1450	10.4	11	71.6	3.8	125/100	509	473	385
-116-19	92.8	20.2	1450	7.1	11	72	3.8	125/100	509	473	385
	116	18.6	1450	7.8	11	75	3.8	125/100	509	473	385
	160	17.2	1450	10.7	11	70	3.8	125/100	509	473	385
-112-17	89.6	18.3	1450	6.3	11	71	3.8	125/100	509	473	385
	112	17.3	1450	7.1	11	74	3.8	125/100	509	473	385
	154.5	16	1450	9.8	11	69	3.8	125/100	509	473	385
ISA125-120-25-O	80	28	1450	8.8	15	69.5	3.8	125/100	558	522	430
	120	25	1450	11.1	15	74	3.8	125/100	558	522	430
	144	23.3	1450	12.3	15	74.8	3.8	125/100	558	522	430
-116-23	77	26.2	1450	8.1	15	68	3.8	125/100	558	522	430
	116	23.3	1450	10.4	15	72	3.8	125/100	558	522	430
	139	21.8	1450	11.5	15	72	3.8	125/100	558	522	430
-112-22	74	24.4	1450	7.4	11	66	3.8	125/100	537	501	409
	112	21.6	1450	9.6	11	70	3.8	125/100	537	501	409
	134	20.3	1450	10.6	11	70	3.8	125/100	537	501	409
ISA125-120-32-O	96	32.5	1450	12.2	18.5	69.5	2.9	125/100	567	533	436
	120	32	1450	14.6	18.5	73.5	2.9	125/100	567	533	436
	144	30	1450	15.9	18.5	74	2.9	125/100	567	533	436
-116-30	92.8	31	1450	11.2	15	69.5	2.9	125/100	567	533	436
	116	29.6	1450	13	15	73	2.9	125/100	567	533	436
	139.3	28.9	1450	14.8	15	73.9	2.9	125/100	567	533	436
-112-27	89.6	28.4	1450	10.4	15	66.2	2.9	125/100	529	495	400
	112	27.3	1450	11.9	15	69.5	2.9	125/100	529	495	400
	134.4	25.3	1450	13.3	15	70	2.9	125/100	529	495	400
ISA125-120-50-O	90	52.1	1450	22	30	58	3.8	125/100	551	602	565
	120	50	1450	25.3	30	64.5	3.8	125/100	551	602	565
	144	50	1450	27.2	30	72	3.8	125/100	551	602	565
ISA150-180-20-O	144	21.1	1450	11.3	15	73.5	4.0	150/125	623	578	464
	180	20	1450	12.6	15	78	4.0	150/125	623	578	464
	216	17.8	1450	13.2	15	79.4	4.0	150/125	623	578	464
-173-18	138.4	19.6	1450	10.3	15	71.7	4.0	150/125	591	546	426
	173	18.5	1450	11.5	15	76	4.0	150/125	591	546	426
	207.6	16.3	1450	11.9	15	77.3	4.0	150/125	591	546	426



性能参数 Performance parameters

型号 Type	流量 Capacity (m³/h)	扬程 Head (m)	转速 Speed (r/min)	功率 Power		效率 Eff. (%)	必须气蚀余量 NPSHr (m)	泵口径 进/出 Impeller Dia. Suction/Discharge (mm)	泵整机重量 Weight of pump (kg)		
				轴功率 Shaft power	电机功率 Motor power				W布置	M布置	L布置
-166-17	132.8	18	1450	9.3	11	69.9	4.0	150/125	591	546	426
	166	17	1450	10.4	11	74	4.0	150/125	591	546	426
	199.2	14.9	1450	10.7	11	75.2	4.0	150/125	591	546	426
-159-15	127.2	16.5	1450	8.4	11	68	4.0	150/125	570	525	405
	159	15.5	1450	9.3	11	72	4.0	150/125	570	525	405
	190.8	13.5	1450	9.6	11	73.2	4.0	150/125	570	525	405
ISA150-180-25-O	144	27.4	1450	14.8	22	72.5	4.0	150/125	671	626	511
	180	25	1450	16.1	22	77	4.0	150/125	671	626	511
	216	22.4	1450	17.2	22	76.6	4.0	150/125	671	626	511
-173-23	138	24.9	1450	12.7	18.5	73.4	4.0	150/125	663	618	503
	173	23.3	1450	14.2	18.5	76.5	4.0	150/125	663	618	503
	208	21.1	1450	15.8	18.5	75.6	4.0	150/125	663	618	503
-166-22	132	22.8	1450	11.7	18.5	70	4.0	150/125	663	618	503
	166	21.6	1450	13.2	18.5	73.5	4.0	150/125	663	618	503
	200	19.5	1450	14.7	18.5	72.5	4.0	150/125	663	618	503
ISA150-180-32-O	144	33	1450	18.8	30	69	4.0	150/125	800	722	648
	180	32	1450	20.6	30	76	4.0	150/125	800	722	648
	258	28	1450	25.6	30	77	4.0	150/125	800	722	648
-173-30	138	30	1450	16.9	30	67	4.0	150/125	800	722	648
	173	29.6	1450	18.5	30	74	4.0	150/125	800	722	648
	248	25	1450	22.5	30	75	4.0	150/125	800	722	648
-166-27	133	28	1450	15.7	22	64.5	4.0	150/125	716	640	566
	166	27.3	1450	17.0	22	72	4.0	150/125	716	640	566
	232	24	1450	20.8	22	73	4.0	150/125	716	640	566
ISA150-180-40-O	144	41	1450	23.3	30	69	4.0	150/125	826	751	690
	180	40	1450	26.5	30	74	4.0	150/125	826	751	690
	250	33	1450	28.8	30	78	4.0	150/125	826	751	690
-173-37	138	38.5	1450	21.0	30	69	4.0	150/125	815	739	665
	173	37.3	1450	23.7	30	74	4.0	150/125	815	739	665
	240	34	1450	28.9	30	77	4.0	150/125	815	739	665
-166-35	133	35	1450	18.6	30	68	4.0	150/125	815	739	665
	166	34.6	1450	21.1	30	73	4.0	150/125	815	739	665
	230	31	1450	25.2	30	77	4.0	150/125	815	739	665
ISA150-180-60-O	144	62	1480	37.1	55	66.7	4.0	150/125	855	890	814
	180	60	1480	41.5	55	72.3	4.0	150/125	855	890	814
	250	55.6	1480	51.8	55	73.4	4.0	150/125	855	890	814
ISA200-280-25-O	224	27.2	1450	21.4	30	77.6	4.2	200/150	906	826	751
	280	25	1450	24.2	30	81	4.2	200/150	906	826	751
	336	22.4	1450	26.6	30	77	4.2	200/150	906	826	751
-270-23	216	25.3	1450	19.4	30	76.6	4.2	200/150	906	826	751
	270	23.2	1450	21.7	30	79	4.2	200/150	906	826	751
	324	20.8	1450	24.2	30	76	4.2	200/150	906	826	751
-260-21	206	23.5	1450	17.4	22	76	4.2	200/150	906	826	751
	260	21.4	1450	19.7	22	78	4.2	200/150	906	826	751
	312	19.3	1450	21.7	22	75.5	4.2	200/150	906	826	751
-250-20	198	21.7	1450	15.8	22	74	4.2	200/150	851	771	671
	250	19.6	1450	18.0	22	76	4.2	200/150	851	771	671
	300	17.8	1450	19.9	22	73	4.2	200/150	851	771	671
-236-18	189	18.2	1450	13.5	18.5	69.5	4.2	200/150	833	753	653
	236	17.8	1450	15.7	18.5	73	4.2	200/150	833	753	653
	283	15.8	1450	17.2	18.5	70.7	4.2	200/150	833	753	653
ISA200-280-32-O	224	34.5	1450	26.9	37	78.2	4.4	200/150	926	821	760
	280	32	1450	30.5	37	80	4.4	200/150	926	821	760
	336	28.9	1450	33.7	37	78.5	4.4	200/150	926	821	760
-270-30	216	32.2	1450	24.1	37	78.5	4.4	200/150	926	821	760
	270	29.6	1450	27.3	37	80.0	4.4	200/150	926	821	760
	324	26.6	1450	30.1	37	78	4.4	200/150	926	821	760
-260-27	208	30.8	1450	22.8	30	76.5	4.4	200/150	926	821	760
	260	27.2	1450	25	30	78	4.4	200/150	926	821	760
	312	25.2	1450	28.5	30	76.05	4.4	200/150	926	821	760
ISA200-280-40-O	224	42	1450	33.8	55	75.8	4.4	200/150	1148	1056	912
	280	40	1450	38.6	55	79	4.4	200/150	1148	1056	912
	360	35.2	1450	44.6	55	77.3	4.4	200/150	1148	1056	912
-270-37	216	39	1450	31	45	74	4.4	200/150	1067	975	831
	270	37.3	1450	35.6	45	77	4.4	200/150	1067	975	831
	347	33	1450	41.5	45	75.2	4.4	200/150	1067	975	831



性能参数 Performance parameters

型号 Type	流量 Capacity (m³/h)	扬程 Head (m)	转速 Speed (r/min)	功率 Power		效率 Eff. (%)	必须气蚀余量 NPSHr (m)	泵口径 进/出 Impeller Dia. Suction/Discharge (mm)	泵整机重量 Weight of pump (kg)		
				轴功率 Shaft power	电机功率 Motor power				W布置	M布置	L布置
-260-35	208	36.2	1450	28.1	37	73	4.4	200/150	1047	955	811
	260	34.6	1450	32.6	37	75	4.4	200/150	1047	955	811
	320	31	1450	36.8	37	73.3	4.4	200/150	1047	955	811
ISA200-280-50-O	224	52.6	1450	43.1	75	74.4	4.4	200/150	1309	1219	1083
	280	50	1450	49.5	75	77	4.4	200/150	1309	1219	1083
	400	42.3	1450	62.1	75	74.2	4.4	200/150	1309	1219	1083
-270-47	216	49	1450	39.3	75	73.4	4.4	200/150	1309	1219	1083
	270	46.6	1450	44.9	75	76	4.4	200/150	1309	1219	1083
	386	38.7	1450	55.5	75	73.2	4.4	200/150	1309	1219	1083
-260-43	208	45.5	1450	35.7	55	72.2	4.4	200/150	1180	1090	948
	260	43.3	1450	41.0	55	74	4.4	200/150	1180	1090	948
	371	35.2	1450	50.0	55	71.2	4.4	200/150	1180	1090	948
ISA200-400-32-O	320	34.5	1450	39.6	55	76	5.0	200/150	1226	1109	1005
	400	32	1450	42.5	55	82	5.0	200/150	1226	1109	1005
	480	27.3	1450	45	55	79.3	5.0	200/150	1226	1109	1005
-384-30	309	31.9	1450	36.1	45	74.4	5.0	200/150	1226	1109	1005
	384	29.6	1450	38.7	45	80	5.0	200/150	1226	1109	1005
	463	25	1450	40.7	45	77.4	5.0	200/150	1226	1109	1005
-368-27	298	29.4	1450	32.8	45	72.8	5.0	200/150	1100	983	886
	368	27.3	1450	34.9	45	78	5.0	200/150	1100	983	886
	446	22.7	1450	36.5	45	75.4	5.0	200/150	1100	983	886
-352-25	286	26.9	1450	29.5	37	71	5.0	200/150	1080	963	886
	352	24.8	1450	31.3	37	76	5.0	200/150	1080	963	886
	430	20.3	1450	32.4	37	73.4	5.0	200/150	1080	963	886
-334-22	274	24.3	1450	26.1	37	69.5	5.0	200/150	1080	963	866
	334	22.4	1450	27.5	37	74	5.0	200/150	1080	963	866
	410	18	1450	28.1	37	71.5	5.0	200/150	1080	963	866
ISA200-400-40-O	320	41	1450	47.0	75	76	5.0	200/150	1413	1303	1157
	400	40	1450	53.8	75	81	5.0	200/150	1413	1303	1157
	480	33.5	1450	58.4	75	75	5.0	200/150	1413	1303	1157
-386-37	304	39.4	1450	40.8	75	75	5.0	200/150	1413	1303	1157
	386	37.3	1450	47.2	75	79	5.0	200/150	1413	1303	1157
	456	33.5	1450	50.3	75	74	5.0	200/150	1413	1303	1157
-372-35	295	37.5	1480	41.3	55	73	5.0	200/150	1269	1159	1022
	372	34.6	1480	44.3	55	77	5.0	200/150	1269	1159	1022
	442	28.5	1480	47.6	55	72	5.0	200/150	1269	1159	1022
ISA200-400-50-O	320	51.7	1450	60.8	90	74	5.0	200/150	1520	1410	1263
	400	50	1450	68.1	90	80	5.0	200/150	1520	1410	1263
	480	46.2	1450	76.4	90	79	5.0	200/150	1520	1410	1263
-386-47	309	49.9	1450	55.7	75	75.3	5.0	200/150	1437	1327	1156
	386	46.6	1450	62.7	75	78	5.0	200/150	1437	1327	1156
	463	43.4	1450	69.3	75	8.9	5.0	200/150	1437	1327	1156
-372-43	298	48.1	1450	54.8	75	71.2	5.0	200/150	1437	1327	1156
	372	43.3	1450	57.7	75	76	5.0	200/150	1437	1327	1156
	446	41.8	1450	65.4	75	77.6	5.0	200/150	1437	1327	1156
ISA200-400-80-O	320	83	1450	120.5	160	60	5.0	200/150	1957	2375	2285
	400	80	1450	134	160	65	5.0	200/150	1957	2375	2285
	480	65	1450	131	160	65	5.0	200/150	1957	2375	2285
ISA250-630-32-O	504	33.7	1450	60.0	90	77.2	5.5	250/200	1590	1475	1321
	630	32	1450	66.6	90	82.5	5.5	250/200	1590	1475	1321
	800	25.7	1450	73.1	90	76.6	5.5	250/200	1590	1475	1321
-605-29	484	31.8	1450	53.5	75	78.4	5.2	250/200	1485	1370	1216
	605	29.5	1450	58.2	75	83.5	5.2	250/200	1485	1370	1216
	780	24.0	1450	66.2	75	77.1	5.2	250/200	1485	1370	1216
-580-27	464	29.2	1450	47.8	75	77.2	5.0	250/200	1485	1370	1216
	580	27.1	1450	52.0	75	82.3	5.0	250/200	1485	1370	1216
	748	22.1	1450	59.3	75	75.9	5.0	250/200	1485	1370	1216
-556-25	445	26.9	1450	42.6	55	76.5	4.8	250/200	1350	1235	1081
	556	24.9	1450	46.2	55	81.6	4.8	250/200	1350	1235	1081
	717	20.3	1450	52.7	55	75.2	4.8	250/200	1350	1235	1081
ISA250-630-36-O	500	37.7	1450	64.5	90	77.2	5.5	250/200	1350	1440	1330
	630	36	1450	74.3	90	83	5.5	250/200	1350	1440	1330
	800	30	1450	85.2	90	76.6	5.5	250/200	1350	1440	1330
ISA250-630-50-O	500	53.0	1450	91.0	132	79.6	5.5	250/200	2075	1950	1780
	630	50.0	1450	102	132	84.7	5.5	250/200	2075	1950	1780
	756	45.8	1450	112	132	84.0	5.5	250/200	2075	1950	1780





性能参数 Performance parameters

型号 Type	流量 Capacity (m³/h)	扬程 Head (m)	转速 Speed (r/min)	功率 Power		效率 Eff. (%)	必须气蚀余量 NPSHr (m)	泵口径 进/出 Impeller Dia. Suction/Discharge (mm)	泵整机重量 Weight of pump (kg)		
				轴功率 Shaft power	电机功率 Motor power				W布置	M布置	L布置
-600-45	470	48.0	1450	79	110	77.5	5.4	250/200	1915	1950	1780
	600	45.0	1450	88	110	83.7	5.4	250/200	1915	1950	1780
	726	40.8	1450	97	110	83.0	5.4	250/200	1915	1950	1780
-560-40	430	43.0	1450	68	90	74.6	5.3	250/200	1665	1700	1530
	560	40.0	1450	74	90	82.2	5.3	250/200	1665	1700	1530
	686	35.8	1450	82	90	81.5	5.3	250/200	1665	1700	1530
-530-35	400	38.0	1450	57	75	72.5	5.1	250/200	1575	1610	1440
	530	35.0	1450	62	75	81.1	5.1	250/200	1575	1610	1440
	656	30.8	1450	68	75	80.4	5.1	250/200	1575	1610	1440
ISA250-630-60-O	500	63	1490	111	160	79.6	5.5	250/200	2080	2110	1940
	630	60	1490	121.5	160	84.7	5.5	250/200	2080	2110	1940
	760	55.8	1490	137.4	160	84	5.5	250/200	2080	2110	1940
ISA250-630-80-O	500	83.1	1490	149.8	250	75.5	5.5	250/200	3000	3100	2900
	630	80	1490	172.5	250	79.5	5.5	250/200	3000	3100	2900
	760	77.8	1490	196.3	250	82	5.5	250/200	300	3100	2900
ISA300-1000-32-O	600	38.0	1490	83.3	110	74.5	6.5	300/250	2100	2220	2000
	1000	32.0	1490	97.9	110	89.0	6.5	300/250	2100	2220	2000
	1200	28.0	1490	106.4	110	86.0	6.5	300/250	2100	2220	2000
-950-28	740	33.8	1490	92.6	110	73.5	6.3	300/250	2100	2220	2000
	950	28.5	1490	87.2	110	84.5	6.3	300/250	2100	2220	2000
	1140	24.8	1490	93.9	110	82.0	6.3	300/250	2100	2220	2000
-890-25	712	29.7	1490	72.9	90	79.0	6.0	300/250	1808	1970	1750
	890	25.0	1490	72.5	90	83.5	6.0	300/250	1808	1970	1750
	1068	21.9	1490	81.6	90	78.0	6.0	300/250	1808	1970	1750
ISA300-1000-36-O	600	40	1490	85.9	132	76	6.5	300/250	2100	2220	2000
	1000	36	1490	109.5	132	89.5	6.5	300/250	2100	2220	2000
	1200	31	1490	117.7	132	86	6.5	300/250	2100	2220	2000
ISA300-1000-50-O	600	57.4	1490	127.5	200	73.5	6.5	300/250	2715	2815	2540
	1000	50.0	1490	162.0	200	84.0	6.5	300/250	2715	2815	2540
	1200	45.8	1490	181.5	200	81.0	6.5	300/250	2715	2815	2540
-950-45	570	48.0	1490	104.9	160	71.0	6.3	300/250	2605	2705	2430
	950	45.0	1490	139.4	160	83.5	6.3	300/250	2605	2705	2430
	1140	40.8	1490	154.4	160	82.0	6.3	300/250	2605	2705	2430
-890-40	540	43.0	1490	90.3	160	70.0	6.0	300/250	2605	2705	2430
	890	40.0	1490	119.6	160	81.0	6.0	300/250	2605	2705	2430
	1068	35.8	1490	131.2	160	79.5	6.0	300/250	2605	2705	2430
-840-35	500	38.0	1490	74.0	110	69.5	5.8	300/250	2345	2445	2170
	840	35.0	1490	101.0	110	79.0	5.8	300/250	2345	2445	2170
	1000	30.8	1490	106.0	110	79.0	5.8	300/250	2345	2445	2170
ISA300-1000-56-O	600	63	1490	140	250	73.5	6.5	300/250	2710	2810	2540
	1000	56	1490	181.5	250	84	6.5	300/250	2710	2810	2540
	1200	51.5	1490	207.6	250	81	6.5	300/250	2710	2810	2540
ISA350-1600-32-O	960	38.4	1490	132.0	185	76.0	7.5	350/300	2545	2720	2510
	1600	32.0	1490	165.9	185	84.0	7.5	350/300	2545	2720	2510
	1920	26.5	1490	170.9	185	81.0	7.5	350/300	2545	2720	2510
-1510-28	910	34.2	1490	112.9	160	75.0	7.0	350/300	2435	2610	2400
	1510	28.5	1490	140.3	160	83.5	7.0	350/300	2435	2610	2400
	1810	23.6	1490	145.3	160	80.0	7.0	350/300	2435	2610	2400
-1410-25	850	30.0	1490	93.8	132	74.0	6.5	350/300	2335	2510	2300
	1410	25.0	1490	117.0	132	82.0	6.5	350/300	2335	2510	2300
	1700	20.5	1490	120.8	132	79.0	6.5	350/300	2335	2510	2300
ISA350-1600-36-O	960	40	1490	137.5	250	76	7.5	350/300	2540	2720	2510
	1600	36	1490	186.7	250	84	7.5	350/300	2540	2720	2510
	1920	31	1490	200.1	250	81	7.5	350/300	2540	2720	2510
ISA350-1600-50-O	960	56.5	1490	196.8	315	75.0	8.0	350/300	3750	3830	3510
	1600	50.0	1490	256.2	315	85.0	8.0	350/300	3750	3830	3510
	1920	44.0	1490	277.0	315	83.0	8.0	350/300	3750	3830	3510
-1520-45	910	50.8	1490	170.5	250	74.0	7.5	350/300	3560	3640	3320
	1520	45.0	1490	221.7	250	84.0	7.5	350/300	3560	3640	3320
	1820	39.5	1490	238.7	250	82.0	7.5	350/300	3560	3640	3320
-1430-40	860	45.2	1490	144.0	220	73.5	7.0	350/300	3520	3600	3280
	1430	40.0	1490	189.9	220	82.0	7.0	350/300	3520	3600	3280
	1720	35.2	1490	203.5	220	81.0	7.0	350/300	3520	3600	3280
-1340-35	800	39.5	1490	119.5	185	72.0	6.5	350/300	3110	3190	2870
	1340	35.0	1490	157.6	185	81.0	6.5	350/300	3110	3190	2870
	1610	30.8	1490	168.7	185	80.0	6.5	350/300	3110	3190	2870
ISA350-1600-56-O	960	63	1490	219.5	355	75	7.5	350/300	3750	3830	3510
	1600	56	1490	286.9	355	85	7.5	350/300	3750	3830	3510
	1920	51.5	1490	324.3	355	83	7.5	350/300	3750	3830	3510





W 型布置泵外形及安装尺寸图

Outline and installing dimensions of W type

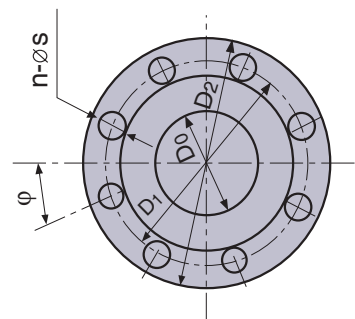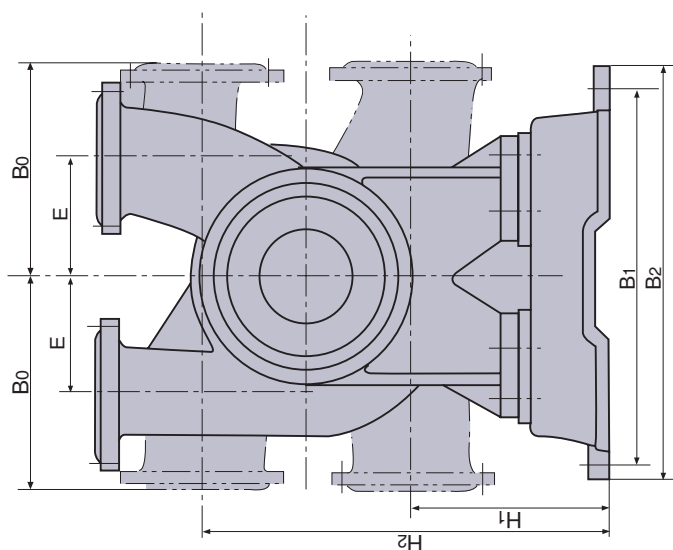

出口法兰
Discharge nozzle flange

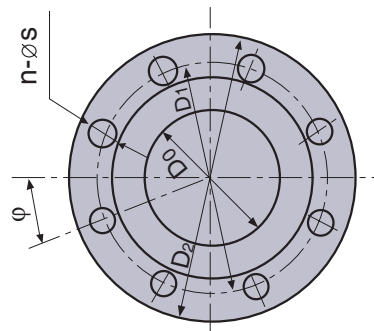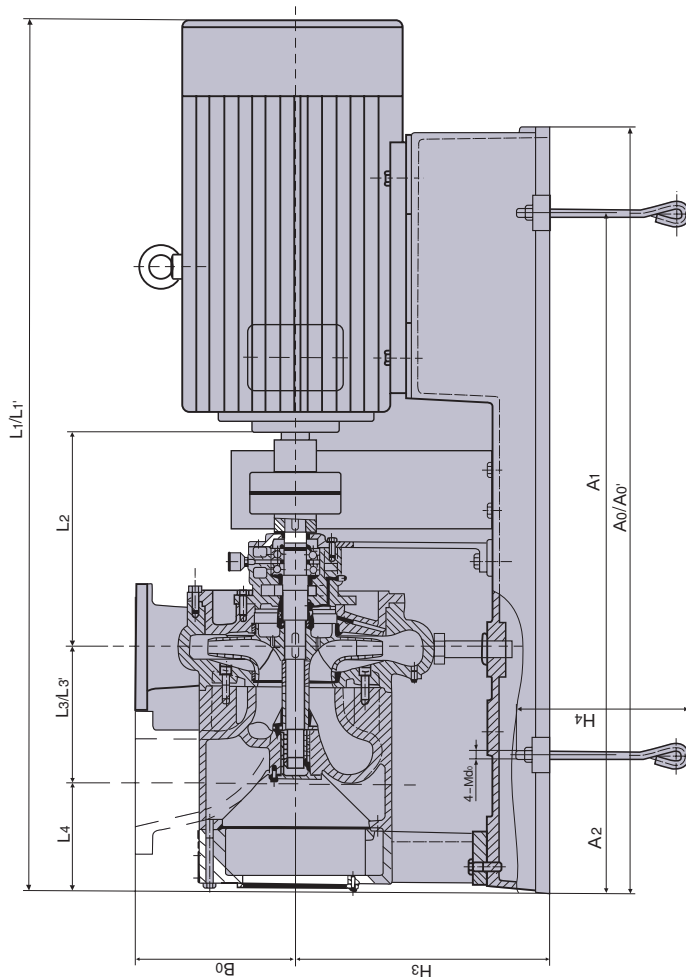

进口法兰
Suction nozzle flange

注: 图中 L_1' 、 L_3' 、 A_0' 尺寸用于 W_7 、 W_8 布置。

Note: L_1' , L_3' , A_0' in this drawing apply to installations W_7 , W_8

W型布置泵外形及安装尺寸表

Outline and installing dimensions of W type

泵型号 Pump size	电机型号 Motor Size 功率 Power	外形及安装尺寸 Outline & Installing dimensions														进口法兰尺寸 Suction flange dimension						出口法兰尺寸 Discharge flange dimension					
		$\frac{A_0}{A_0'}$	A ₁	A ₂	B ₀	B ₁	B ₂	E	H ₁	H ₂	H ₃	H ₄	$\frac{L_1}{L_1'}$	L ₂	$\frac{L_3}{L_3'}$	L ₄	d ₀	D ₀	D ₁	D ₂	φ	n-φS	D ₀	D ₁	D ₂	φ	n-φS
ISA40-6-8-O	Y801-4/0.55	$\frac{660}{-}$	460	100	180	350	395	90	180	360	270	400	$\frac{708}{-}$	273	$\frac{84}{-}$	106	16	Φ40	Φ110	Φ150	45°	4-Φ17.5	Φ32	Φ100	Φ140	45°	4-Φ17.5
-6-7	Y801-4/0.55	$\frac{660}{-}$	460	100	180	350	395	90	180	360	270	400	$\frac{708}{-}$	273	$\frac{84}{-}$	106	16	Φ40	Φ110	Φ150	45°	4-Φ17.5	Φ32	Φ100	Φ140	45°	4-Φ17.5
-5-6	Y801-4/0.55	$\frac{660}{-}$	460	100	180	350	395	90	180	360	270	400	$\frac{708}{-}$	273	$\frac{84}{-}$	106	16	Φ40	Φ110	Φ150	45°	4-Φ17.5	Φ32	Φ100	Φ140	45°	4-Φ17.5
ISA40-6-12-O	Y802-4/0.75	$\frac{660}{-}$	460	100	180	350	395	90	180	360	270	400	$\frac{708}{-}$	273	$\frac{84}{-}$	106	16	Φ40	Φ110	Φ150	45°	4-Φ17.5	Φ32	Φ100	Φ140	45°	4-Φ17.5
-6-11	Y802-4/0.75	$\frac{660}{-}$	460	100	180	350	395	90	180	360	270	400	$\frac{708}{-}$	273	$\frac{84}{-}$	106	16	Φ40	Φ110	Φ150	45°	4-Φ17.5	Φ32	Φ100	Φ140	45°	4-Φ17.5
-6-9	Y801-4/0.55	$\frac{660}{-}$	460	100	180	350	395	90	180	360	270	400	$\frac{708}{-}$	273	$\frac{84}{-}$	106	16	Φ40	Φ110	Φ150	45°	4-Φ17.5	Φ32	Φ100	Φ140	45°	4-Φ17.5
ISA50-12-8-O	Y90S-4/1.1	$\frac{700}{770}$	460	120	180	350	395	100	170	370	270	400	$\frac{733}{803}$	283	$\frac{84}{154}$	106	16	Φ50	Φ125	Φ165	45°	4-Φ17.5	Φ40	Φ110	Φ150	45°	4-Φ17.5
-12-7	Y802-4/0.75	$\frac{660}{730}$	460	100	180	350	395	100	170	370	270	400	$\frac{708}{778}$	273	$\frac{84}{154}$	106	16	Φ50	Φ125	Φ165	45°	4-Φ17.5	Φ40	Φ110	Φ150	45°	4-Φ17.5
-11-6	Y801-4/0.55	$\frac{660}{730}$	460	100	180	350	395	100	170	370	270	400	$\frac{708}{778}$	273	$\frac{84}{154}$	106	16	Φ50	Φ125	Φ165	45°	4-Φ17.5	Φ40	Φ110	Φ150	45°	4-Φ17.5
ISA50-12-12-O	Y90L-4/1.5	$\frac{700}{770}$	460	120	180	350	395	100	170	370	270	400	$\frac{733}{803}$	283	$\frac{84}{154}$	106	16	Φ50	Φ125	Φ165	45°	4-Φ17.5	Φ40	Φ110	Φ150	45°	4-Φ17.5
-12-11	Y90S-4/1.1	$\frac{700}{770}$	460	120	180	350	395	100	170	370	270	400	$\frac{733}{803}$	283	$\frac{84}{154}$	106	16	Φ50	Φ125	Φ165	45°	4-Φ17.5	Φ40	Φ110	Φ150	45°	4-Φ17.5
-11-9	Y802-4/0.75	$\frac{660}{730}$	460	100	180	350	395	100	170	370	270	400	$\frac{708}{778}$	273	$\frac{84}{154}$	106	16	Φ50	Φ125	Φ165	45°	4-Φ17.5	Φ40	Φ110	Φ150	45°	4-Φ17.5
ISA65-20-8-O	Y90L-4/1.5	$\frac{700}{770}$	460	120	180	350	395	110	160	380	270	400	$\frac{758}{828}$	283	$\frac{84}{154}$	106	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
-19-7	Y90S-4/1.1	$\frac{700}{770}$	460	120	180	350	395	110	160	380	270	400	$\frac{733}{803}$	283	$\frac{84}{154}$	106	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
-17-6	Y90S-4/1.1	$\frac{700}{770}$	460	120	180	350	395	110	160	380	270	400	$\frac{733}{803}$	283	$\frac{84}{154}$	106	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
ISA65-20-12-O	Y100L ₁ -4/2.2	$\frac{740}{810}$	460	140	180	350	395	110	160	380	270	400	$\frac{803}{873}$	293	$\frac{84}{154}$	106	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
-19-11	Y90L-4/1.5	$\frac{700}{770}$	460	120	180	350	395	110	160	380	270	400	$\frac{758}{828}$	283	$\frac{84}{154}$	106	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
-17-9	Y90L-4/1.5	$\frac{700}{770}$	460	120	180	350	395	110	160	380	270	400	$\frac{758}{828}$	283	$\frac{84}{154}$	106	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
ISA65-20-20-O	Y112M-4/4	$\frac{890}{930}$	660	115	200	400	450	120	200	440	320	400	$\frac{969}{1007}$	352	$\frac{100}{140}$	175	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
-19-18	Y100L ₂ -4/3	$\frac{890}{930}$	660	115	200	400	450	120	200	440	320	400	$\frac{947}{987}$	352	$\frac{100}{140}$	175	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
-18-16	Y100L ₂ -4/3	$\frac{890}{930}$	660	115	200	400	450	120	200	440	320	400	$\frac{947}{987}$	352	$\frac{100}{140}$	175	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
-17-14	Y100L ₁ -4/2.2	$\frac{890}{930}$	660	115	200	400	450	120	200	440	320	400	$\frac{947}{987}$	352	$\frac{100}{140}$	175	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ125	45°	4-Φ17.5
ISA80-32-12-O	Y100L ₂ -4/3	$\frac{930}{930}$	660	115	220	400	450	130	190	450	320	400	$\frac{947}{987}$	352	$\frac{120}{160}$	155	16	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
-30-11	Y100L ₁ -4/2.2	$\frac{930}{930}$	660	115	220	400	450	130	190	450	320	400	$\frac{947}{987}$	352	$\frac{120}{160}$	155	16	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
-28-7	Y100L ₁ -4/2.2	$\frac{930}{930}$	660	115	220	400	450	130	190	450	320	400	$\frac{947}{987}$	352	$\frac{120}{160}$	155	16	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
ISA80-32-16-O	Y100L ₂ -4/3	$\frac{930}{930}$	660	115	220	400	450	130	190	450	320	400	$\frac{947}{987}$	352	$\frac{120}{160}$	155	16	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
-30-14	Y100L ₂ -4/3	$\frac{930}{930}$	660	115	220	400	450	130	190	450	320	400	$\frac{947}{987}$	352	$\frac{120}{160}$	155	16	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
ISA80-32-25-O	Y132S-4/5.5	$\frac{980}{-}$	710	120	250	490	540	130	240	500	370	400	$\frac{1042}{-}$	372	$\frac{120}{-}$	155	20	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
-30-23	Y132S-4/5.5	$\frac{980}{-}$	710	120	250	490	540	130	240	500	370	400	$\frac{1042}{-}$	372	$\frac{120}{-}$	155	20	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
-29-20	Y112M-4/4	$\frac{980}{-}$	710	120	250	490	540	130	240	500	370	400	$\frac{967}{-}$	352	$\frac{120}{-}$	155	20	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
-27-18	Y112M-4/4	$\frac{980}{-}$	710	120	250	490	540	130	240	500	370	400	$\frac{987}{-}$	352	$\frac{120}{-}$	155	20	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
ISA80-50-16-O	Y112M-4/4	$\frac{930}{930}$	660	115	220	400	450	130	190	450	320	400	$\frac{967}{1007}$	352	$\frac{120}{160}$	155	16	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
-48-14	Y112M-4/4	$\frac{930}{930}$	600	115	220	400	450	130	190	450	320	400	$\frac{967}{1007}$	352	$\frac{120}{160}$	155	16	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5



W型布置泵外形及安装尺寸表

Outline and installing dimensions of W type

泵型号 Pump size	电机型号 Motor Size	功率 Power	外形及安装尺寸 Outline & Installing dimensions														进口法兰尺寸 Suction flange dimension						出口法兰尺寸 Discharge flange dimension					
			$\frac{A_0}{A_0'}$	A ₁	A ₂	B ₀	B ₁	B ₂	E	H ₁	H ₂	H ₃	H ₄	$\frac{L_1}{L_1'}$	L ₂	$\frac{L_3}{L_3'}$	L ₄	d ₀	D ₀	D ₁	D ₂	φ	n-φS	D ₀	D ₁	D ₂	φ	n-φS
-45-13	Y100L2-4/3	$\frac{930}{930}$	660	115	220	400	450	130	190	450	320	400	$\frac{947}{987}$	352	$\frac{120}{160}$	155	16	φ80	φ160	φ200	22.5"	8-φ17.5	φ65	φ145	φ185	22.5"	8-φ17.5	
ISA80-50-25-O	Y132M-4/7.5	$\frac{980}{-}$	710	120	250	490	540	130	240	500	370	400	$\frac{1082}{-}$	372	$\frac{120}{-}$	155	20	φ80	φ160	φ200	22.5"	8-φ17.5	φ65	φ145	φ185	22.5"	8-φ17.5	
-47-23	Y132M-4/7.5	$\frac{980}{-}$	710	120	250	490	540	130	240	500	370	400	$\frac{1082}{-}$	372	$\frac{120}{-}$	155	20	φ80	φ160	φ200	22.5"	8-φ17.5	φ65	φ145	φ185	22.5"	8-φ17.5	
-45-20	Y132S-4/5.5	$\frac{980}{-}$	710	120	250	490	540	130	240	500	370	400	$\frac{1042}{-}$	372	$\frac{120}{-}$	155	20	φ80	φ160	φ200	22.5"	8-φ17.5	φ65	φ145	φ185	22.5"	8-φ17.5	
-42-18	Y132S-4/5.5	$\frac{980}{-}$	710	120	250	490	540	130	240	500	370	400	$\frac{1042}{-}$	372	$\frac{120}{-}$	155	20	φ80	φ160	φ200	22.5"	8-φ17.5	φ65	φ145	φ185	22.5"	8-φ17.5	
ISA80-50-32-O	Y160M-4/11	$\frac{1090}{-}$	780	120	250	490	540	130	240	500	370	400	$\frac{1174}{-}$	403	$\frac{120}{-}$	155	20	φ80	φ160	φ200	22.5"	8-φ17.5	φ65	φ145	φ185	22.5"	8-φ17.5	
ISA100-80-16-O	Y132M-4/7.5	$\frac{1100}{-}$	740	180	280	490	540	150	250	550	400	400	$\frac{1164}{-}$	424	$\frac{115}{-}$	190	20	φ100	φ180	φ220	22.5"	8-φ17.5	φ80	φ160	φ200	22.5"	8-φ17.5	
-77-15	Y132S-4/5.5	$\frac{1100}{-}$	740	180	280	490	540	150	250	550	400	400	$\frac{1124}{-}$	424	$\frac{115}{-}$	190	20	φ100	φ180	φ220	22.5"	8-φ17.5	φ80	φ160	φ200	22.5"	8-φ17.5	
-74-14	Y132S-4/5.5	$\frac{1100}{-}$	740	180	280	490	540	150	250	550	400	400	$\frac{1124}{-}$	424	$\frac{115}{-}$	190	20	φ100	φ180	φ220	22.5"	8-φ17.5	φ80	φ160	φ200	22.5"	8-φ17.5	
ISA100-80-20-O	Y132M-4/7.5	$\frac{1100}{-}$	740	180	280	490	540	150	250	550	400	400	$\frac{1164}{-}$	424	$\frac{115}{-}$	190	20	φ100	φ180	φ220	22.5"	8-φ17.5	φ80	φ160	φ200	22.5"	8-φ17.5	
-77-19	Y132M-4/7.5	$\frac{1100}{-}$	740	180	280	490	540	150	250	550	400	400	$\frac{1164}{-}$	424	$\frac{115}{-}$	190	20	φ100	φ180	φ220	22.5"	8-φ17.5	φ80	φ160	φ200	22.5"	8-φ17.5	
-74-17	Y132S-4/5.5	$\frac{1100}{-}$	740	180	280	490	540	150	250	550	400	400	$\frac{1124}{-}$	424	$\frac{115}{-}$	190	20	φ100	φ180	φ220	22.5"	8-φ17.5	φ80	φ160	φ200	22.5"	8-φ17.5	
ISA100-80-25-O	Y160M-4/11	$\frac{1180}{-}$	840	160	280	490	540	150	250	550	400	400	$\frac{1235}{-}$	454	$\frac{115}{-}$	170	20	φ100	φ180	φ220	22.5"	8-φ17.5	φ80	φ160	φ200	22.5"	8-φ17.5	
-77-23	Y160M-4/11	$\frac{1180}{-}$	840	160	280	490	540	150	250	550	400	400	$\frac{1235}{-}$	454	$\frac{115}{-}$	170	20	φ100	φ180	φ220	22.5"	8-φ17.5	φ80	φ160	φ200	22.5"	8-φ17.5	
-74-22	Y160M-4/11	$\frac{1180}{-}$	840	160	280	490	540	150	250	550	400	400	$\frac{1235}{-}$	454	$\frac{115}{-}$	170	20	φ100	φ180	φ220	22.5"	8-φ17.5	φ80	φ160	φ200	22.5"	8-φ17.5	
ISA100-80-32-O	Y160L-4/15	$\frac{1180}{-}$	840	160	280	490	540	150	250	550	400	400	$\frac{1280}{-}$	454	$\frac{115}{-}$	170	20	φ100	φ180	φ220	22.5"	8-φ17.5	φ80	φ160	φ200	22.5"	8-φ17.5	
-77-30	Y160L-4/15	$\frac{1180}{-}$	840	160	280	490	540	150	250	550	400	400	$\frac{1280}{-}$	454	$\frac{115}{-}$	170	20	φ100	φ180	φ220	22.5"	8-φ17.5	φ80	φ160	φ200	22.5"	8-φ17.5	
-74-27	Y160M-4/11	$\frac{1180}{-}$	840	160	280	490	540	150	250	550	400	400	$\frac{1235}{-}$	454	$\frac{115}{-}$	170	20	φ100	φ180	φ220	22.5"	8-φ17.5	φ80	φ160	φ200	22.5"	8-φ17.5	
ISA125-120-16-O	Y132M-4/7.5	$\frac{1220}{-}$	760	200	280	520	560	175	225	575	400	400	$\frac{1184}{-}$	454	$\frac{125}{-}$	260	20	φ125	φ210	φ250	22.5"	8-φ17.5	φ100	φ190	φ235	22.5"	8-φ22	
-116-15	Y132M-4/7.5	$\frac{1220}{-}$	760	200	280	520	560	175	225	575	400	400	$\frac{1184}{-}$	454	$\frac{125}{-}$	260	20	φ125	φ210	φ250	22.5"	8-φ17.5	φ100	φ190	φ235	22.5"	8-φ22	
-112-14	Y132M-4/7.5	$\frac{1220}{-}$	820	200	280	520	560	175	225	575	400	400	$\frac{1184}{-}$	454	$\frac{125}{-}$	260	20	φ125	φ210	φ250	22.5"	8-φ17.5	φ100	φ190	φ235	22.5"	8-φ22	
ISA125-120-20-O	Y160M-4/11	$\frac{1220}{-}$	820	200	280	520	560	175	225	575	400	400	$\frac{1269}{-}$	454	$\frac{125}{-}$	260	20	φ125	φ210	φ250	22.5"	8-φ17.5	φ100	φ190	φ235	22.5"	8-φ22	
-116-19	Y160M-4/11	$\frac{1220}{-}$	820	200	280	520	560	175	225	575	400	400	$\frac{1269}{-}$	454	$\frac{125}{-}$	260	20	φ125	φ210	φ250	22.5"	8-φ17.5	φ100	φ190	φ235	22.5"	8-φ22	
-112-17	Y160M-4/11	$\frac{1220}{-}$	820	200	280	520	560	175	225	575	400	400	$\frac{1269}{-}$	454	$\frac{125}{-}$	260	20	φ125	φ210	φ250	22.5"	8-φ17.5	φ100	φ190	φ235	22.5"	8-φ22	
ISA125-120-25-O	Y160L-4/15	$\frac{1220}{-}$	820	200	315	520	560	175	225	575	400	400	$\frac{1309}{-}$	454	$\frac{120}{-}$	200	20	φ125	φ210	φ250	22.5"	8-φ17.5	φ100	φ190	φ235	22.5"	8-φ22	
-116-23	Y160L-4/15	$\frac{1220}{-}$	820	200	315	520	560	175	225	575	400	400	$\frac{1309}{-}$	454	$\frac{120}{-}$	200	20	φ125	φ210	φ250	22.5"	8-φ17.5	φ100	φ190	φ235	22.5"	8-φ22	
-112-22	Y160M-4/11	$\frac{1220}{-}$	820	200	315	520	560	175	225	575	400	400	$\frac{1264}{-}$	454	$\frac{120}{-}$	200	20	φ125	φ210	φ250	22.5"	8-φ17.5	φ100	φ190	φ235	22.5"	8-φ22	
ISA125-120-32-O	Y180M-4/18.5	$\frac{1220}{-}$	820	200	315	520	560	175	225	575	400	400	$\frac{1334}{-}$	454	$\frac{120}{-}$	200	20	φ125	φ210	φ250	22.5"	8-φ17.5	φ100	φ190	φ235	22.5"	8-φ22	
-116-30	Y160L-4/15	$\frac{1220}{-}$	820	200	315	520	560	175	225	575	400	400	$\frac{1309}{-}$	454	$\frac{120}{-}$	200	20	φ125	φ210	φ250	22.5"	8-φ17.5	φ100	φ190	φ235	22.5"	8-φ22	
-112-27	Y160L-4/15	$\frac{1220}{-}$	820	200	315	520	560	175	225	575	400	400	$\frac{1309}{-}$	454	$\frac{120}{-}$	200	20	φ125	φ210	φ250	22.5"	8-φ17.5	φ100	φ190	φ235	22.5"	8-φ22	
ISA125-120-50-O	Y200L-4/30	$\frac{1277}{-}$	877	200	315	520	570	175	235	585	410	400	$\frac{1439}{-}$	454	$\frac{120}{-}$	200	20	φ125	φ210	φ250	22.5"	8-φ17.5	φ100	φ190	φ235	22.5"	8-φ22	
ISA150-180-20-O	Y160L-4/15	$\frac{1280}{-}$	880	200	315	570	630	200	250	650	450	500	$\frac{1344}{-}$	454	$\frac{155}{-}$	270	24	φ150	φ240	φ285	22.5"	8-φ22	φ125	φ220	φ270	22.5"	8-φ26	
-173-18	Y160L-4/15	$\frac{1280}{-}$	880	200	315	570	630	200	250	650	450	500	$\frac{1344}{-}$	454	$\frac{155}{-}$	270	24	φ150	φ240	φ285	22.5"	8-φ22	φ125	φ220	φ270	22.5"	8-φ26	



W型布置泵外形及安装尺寸表

Outline and installing dimensions of W type

泵型号 Pump size	电机型号 Motor Size	功率 Power	外形及安装尺寸 Outline & Installing dimensions														进口法兰尺寸 Suction flange dimension						出口法兰尺寸 Discharge flange dimension					
			$\frac{A_0}{A_0'}$	A ₁	A ₂	B ₀	B ₁	B ₂	E	H ₁	H ₂	H ₃	H ₄	$\frac{L_1}{L_1'}$	L ₂	$\frac{L_3}{L_3'}$	L ₄	d ₀	D ₀	D ₁	D ₂	Φ	n-ΦS	D ₀	D ₁	D ₂	Φ	n-ΦS
-166-17	Y160M-4/11		$\frac{1280}{-}$	880	200	315	570	630	200	250	650	450	500	$\frac{1299}{-}$	454	$\frac{155}{-}$	270	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
-159-15	Y160M-4/11		$\frac{1280}{-}$	880	200	315	570	630	200	250	650	450	500	$\frac{1299}{-}$	454	$\frac{155}{-}$	270	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
ISA150-180-25-O	Y180L4/22		$\frac{1320}{-}$	920	200	315	570	630	200	250	650	450	500	$\frac{1409}{-}$	454	$\frac{155}{-}$	200	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
-173-23	Y180M-4/18.5		$\frac{1320}{-}$	920	200	315	570	630	200	250	650	450	500	$\frac{1369}{-}$	454	$\frac{155}{-}$	200	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
-166-22	Y180M-4/18.5		$\frac{1320}{-}$	920	200	315	570	630	200	250	650	450	500	$\frac{1369}{-}$	454	$\frac{155}{-}$	200	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
ISA150-180-32-O	Y200L-4/30		$\frac{1360}{-}$	960	200	315	570	630	200	250	650	450	500	$\frac{1474}{-}$	454	$\frac{145}{-}$	210	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
-173-30	Y200L-4/30		$\frac{1320}{-}$	920	200	315	570	630	200	250	650	450	500	$\frac{1409}{-}$	454	$\frac{145}{-}$	210	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
-166-27	1Y180L-4/22		$\frac{1320}{-}$	920	200	315	570	630	200	250	650	450	500	$\frac{1409}{-}$	454	$\frac{145}{-}$	210	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
ISA150-180-40-O	Y200L-4/30		$\frac{1360}{-}$	960	200	315	570	630	200	250	650	450	500	$\frac{1474}{-}$	454	$\frac{145}{-}$	210	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
-173-37	Y200L-4/30		$\frac{1360}{-}$	960	200	315	570	630	200	250	650	450	500	$\frac{1474}{-}$	454	$\frac{145}{-}$	210	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
-166-35	Y200L-4/30		$\frac{1360}{-}$	960	200	315	570	630	200	250	650	450	500	$\frac{1474}{-}$	454	$\frac{145}{-}$	210	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
ISA150-180-60-O	Y250M-4/55		$\frac{1558}{-}$	1158	200	315	570	630	200	250	650	450	500	$\frac{1707}{-}$	484	$\frac{145}{222}$	210	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
ISA200-280-25-O	Y200L-4/30		$\frac{1400}{1450}$	1000	200	350	570	630	200	280	680	480	500	$\frac{1567}{1617}$	514	$\frac{180}{230}$	208	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-270-23	Y200L-4/30		$\frac{1400}{1450}$	1000	200	350	570	630	200	280	680	480	500	$\frac{1567}{1617}$	514	$\frac{180}{230}$	208	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-260-21	Y180L-4/22		$\frac{1360}{1410}$	960	200	350	570	630	200	280	680	480	500	$\frac{1502}{1552}$	514	$\frac{180}{230}$	208	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-250-20	Y180M-4/22		$\frac{1360}{1450}$	1000	200	350	570	630	200	280	680	480	500	$\frac{1502}{1552}$	514	$\frac{180}{230}$	208	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-236-18	Y180M-4/18.5		$\frac{1360}{1450}$	1000	200	350	570	630	200	280	680	480	500	$\frac{1462}{1512}$	514	$\frac{180}{230}$	208	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
ISA200-280-32-O	Y225S-4/37		$\frac{1460}{1520}$	1060	200	350	570	630	200	280	680	480	500	$\frac{1612}{1662}$	544	$\frac{180}{230}$	208	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-270-30	Y225S-4/37		$\frac{1460}{1520}$	1060	200	350	570	630	200	280	680	480	500	$\frac{1612}{1662}$	544	$\frac{180}{230}$	208	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-260-27	Y200L-4/30		$\frac{1460}{1520}$	1060	200	315	570	630	200	280	680	480	500	$\frac{1537}{1587}$	514	$\frac{180}{230}$	208	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
ISA200-280-40-O	Y250M-4/55		$\frac{1675}{-}$	1200	230	400	670	730	200	305	705	505	500	$\frac{1753.5}{-}$	544	$\frac{180}{-}$	234.5	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-270-37	Y225M-4/45		$\frac{1500}{-}$	1060	220	400	670	730	200	305	705	505	500	$\frac{1663.5}{-}$	544	$\frac{180}{-}$	234.5	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-260-35	Y225S-4/37		$\frac{1500}{-}$	1060	220	400	670	730	200	305	705	505	500	$\frac{1638.5}{-}$	544	$\frac{180}{-}$	234.5	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
ISA200-280-50-O	Y280S-4/75		$\frac{1675}{-}$	1200	240	400	670	730	200	305	705	505	500	$\frac{1818.5}{-}$	544	$\frac{180}{-}$	234.5	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-270-47	Y280S-4/75		$\frac{1675}{-}$	1200	240	400	670	730	200	305	705	505	500	$\frac{1818.5}{-}$	544	$\frac{180}{-}$	234.5	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-260-43	Y250M-4/55		$\frac{1675}{-}$	1200	230	400	670	730	200	305	705	505	500	$\frac{1748.5}{-}$	544	$\frac{180}{-}$	234.5	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
ISA200-400-32-O	Y250M-4/55		$\frac{1580}{-}$	1120	230	400	670	730	230	275	735	505	500	$\frac{1759.5}{-}$	544	$\frac{191}{-}$	234.5	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-384-30	Y225M-4/55		$\frac{1500}{-}$	1060	220	400	670	730	230	275	735	505	500	$\frac{1674.5}{-}$	544	$\frac{191}{-}$	234.5	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-368-27	Y225M-4/55		$\frac{1500}{-}$	1060	220	400	670	730	230	275	735	505	500	$\frac{1647.5}{-}$	544	$\frac{191}{-}$	234.5	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-352-25	Y225S-4/37		$\frac{1500}{-}$	1060	220	400	670	730	230	275	735	505	500	$\frac{1649.5}{-}$	544	$\frac{191}{-}$	234.5	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-334-22	Y225S-4/37		$\frac{1500}{-}$	1060	220	400	670	730	230	275	735	505	500	$\frac{1749.5}{-}$	544	$\frac{191}{-}$	234.5	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
ISA200-400-40-O	Y280S-4/75		$\frac{1690}{-}$	1200	245	400	670	730	230	300	760	530	500	$\frac{1829.5}{-}$	544	$\frac{191}{-}$	234.5	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-386-37	Y280S-4/75		$\frac{1690}{-}$	1200	245	400	670	730	230	300	760	530	500	$\frac{1829.5}{-}$	544	$\frac{191}{-}$	234.5	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26




W型布置泵外形及安装尺寸表

Outline and installing dimensions of W type

泵型号 Pump size	电机型号 Motor Size	功率 Power	外形及安装尺寸 Outline & Installing dimensions																	进口法兰尺寸 Suction flange dimension						出口法兰尺寸 Discharge flange dimension				
			$\frac{A_0}{A_0'}$	A ₁	A ₂	B ₀	B ₁	B ₂	E	H ₁	H ₂	H ₃	H ₄	$\frac{L_1}{L_1'}$	L ₂	$\frac{L_3}{L_3'}$	L ₄	d ₀	D ₀	D ₁	D ₂	φ	n-φS	D ₀	D ₁	D ₂	φ	n-φS		
-372-35	Y250M-4/55		1580 —	1120	230	400	670	730	230	300	760	530	500	1759.5 —	544	191 —	234.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26		
ISA200-400-50-O	Y280M-4/90		1690 —	1200	245	400	670	730	230	300	760	530	500	1879.5 —	544	191 —	234.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26		
-386-47	Y280S-4/75		1690 —	1200	245	400	670	730	230	300	760	530	500	1829.5 —	544	191 —	234.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26		
-372-43	Y280S-4/75		1690 —	1200	245	400	670	730	230	300	760	530	500	1829.5 —	544	191 —	234.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26		
ISA200-400-80-O	Y315M ₂ -4/160		2009	1339	335	400	790	850	230	500	960	730	500	2310	623	230	287	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26		
-630-32	Y280M-4/90		1806	1280	263	430	670	730	250	300	800	550	500	1983	554	270	249	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26		
-605-29	Y280S-4/75		1806	1280	263	430	670	730	250	300	800	550	500	1933	554	270	249	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26		
-580-27	Y280S-4/75		1806	1280	263	430	670	730	250	300	800	550	500	1933	554	270	249	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26		
-556-25	Y250M-4/55		1806	1200	245	430	670	730	250	300	800	550	500	1863	554	270	249	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26		
ISA250-630-36-O	Y280M-4/90		1806	1280	263	430	670	730	250	300	800	550	500	1983	554	270	249	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26		
ISA250-630-50-O	Y350M ₁ -4/132		2020	1480	270	460	800	860	250	345	845	595	500	2284	606	300	278	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26		
-600-45	Y315S-4/110		2020	1480	270	460	800	860	250	345	845	595	500	2234	606	300	278	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26		
-560-40	Y280M-4/90		1910	1360	270	460	800	860	250	345	845	595	500	2064	576	300	278	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26		
-530-35	Y280S-4/75		1910	1360	270	460	800	860	250	345	845	595	500	2014	576	300	278	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26		
ISA250-630-60-O	Y315M ₂ -4/160		2020	1480	270	460	800	860	250	345	845	595	500	2284	606	300	278	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26		
ISA250-630-80-O	Y355M ₂ -4/250		2299	1500	350	460	840	930	250	480	980	730	400	2650	616	387	302	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26		
ISA300-1000-32-O	Y315S-4/110		2220	1520	350	500	790	852	290	390	970	680	500	2342.5	617	379	296	24	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30		
-950-28	Y315S-4/110		2220	1520	350	500	790	852	290	390	970	680	500	2342.5	617	379	296	24	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30		
-890-25	Y280M-4/90		2125	1425	350	500	790	852	290	390	970	680	500	2172	617	379	296	24	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30		
ISA300-1000-36-O	Y315M ₁ -4/132		2220	1520	350	500	790	852	290	390	970	680	500	2392	617	379	296	24	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30		
ISA300-1000-50-O	Y315L ₂ -4/200		2210	1540	335	550	790	852	328	402	1058	730	500	2502	616	389	326	30	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30		
-950-45	Y315L ₁ -4/160		2210	1540	335	550	790	852	328	402	1058	730	500	2432	616	389	326	30	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30		
-890-40	Y315L ₁ -4/160		2210	1540	335	550	790	852	328	402	1058	730	500	2432	616	389	326	30	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30		
-840-35	Y315S-4/110		2210	1540	335	550	790	852	328	402	1058	730	500	2402	616	389	326	30	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30		
ISA300-1000-56-O	Y355M ₂ -4/250		2330	1540	335	550	840	930	328	402	1058	730	500	2747	616	389	326	30	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30		
ISA350-1600-32-O	Y315L-4/185		2210	1540	335	600	790	852	335	395	1065	730	500	2500	641	376	312	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	11.25°	16-φ30		
-1510-28	Y315L ₁ -4/160		2210	1540	335	600	790	852	335	395	1065	730	500	2500	641	376	312	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	11.25°	16-φ30		
-1410-25	Y315M ₁ -4/132		2210	1540	335	600	790	852	335	395	1065	730	500	2430	641	376	312	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	11.25°	16-φ30		
ISA350-1600-36-O	Y355M ₂ -4/250		2330	1540	335	600	840	930	335	395	1065	730	500	2745	641	376	312	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	15°	16-φ30		
ISA350-1600-50-O	Y355L ₁ -4/315		2550	1650	600	980	1080	860	330	420	1080	750	600	2857	652	400	405	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	11.25°	16-φ30		
-1520-45	Y355M ₂ -4/250		2550	1650	600	980	1080	860	330	420	1080	750	600	2857	652	400	405	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	11.25°	16-φ30		
-1430-40	Y355M-4/220		2550	1650	600	980	1080	860	330	420	1080	750	600	2857	652	400	405	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	11.25°	16-φ30		
-1340-35	Y315L-4/185		2550	1650	400	980	1080	860	330	420	1080	750	600	2627	652	400	405	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	11.25°	16-φ30		
ISA350-1600-56-O	Y400-4/355 (6kv)		3027	2100	300	600	795	850	330	420	1080	750	600	3027	692	400	405	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	15°	16-φ30		



M 型布置泵外形及安装尺寸图
Outline and installing dimensions of M type

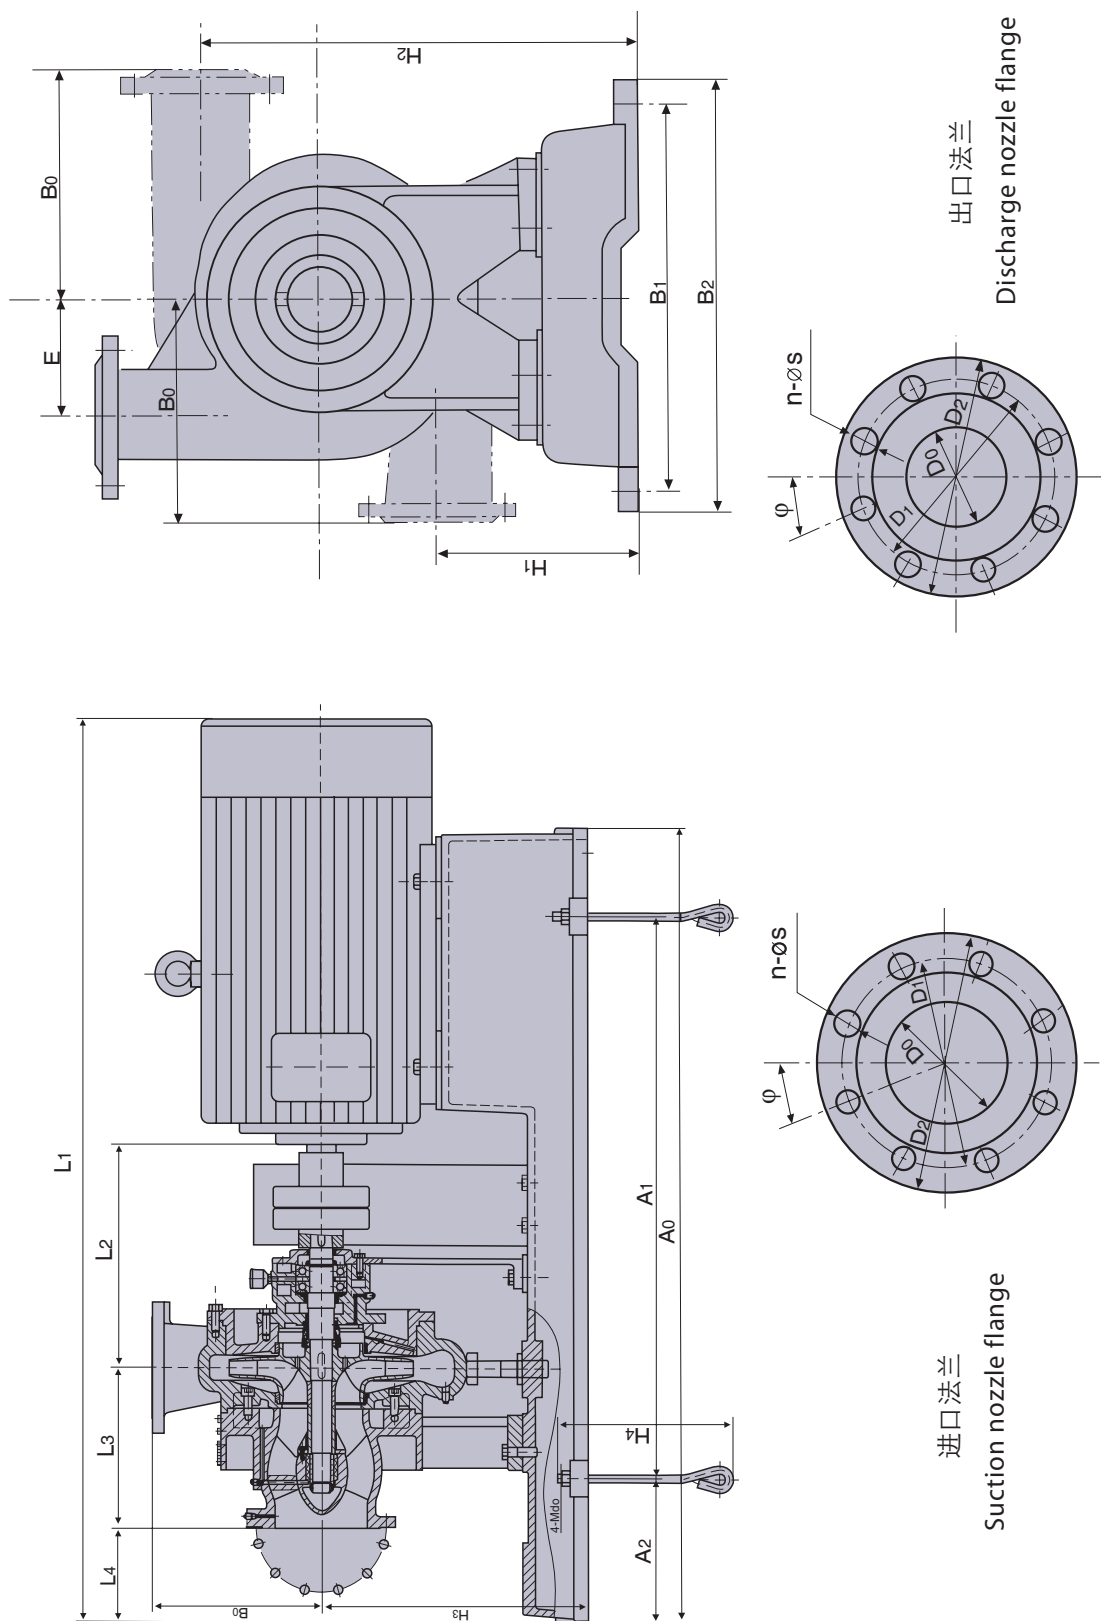

M型布置泵外形及安装尺寸表

Outline and installing dimensions of M type

泵型号 Pump size	电机型号 Motor Size 功率 Power	外形及安装尺寸 Outline & installing dimensions																进口法兰尺寸 Suction flange dimension					出口法兰尺寸 Discharge flange dimension				
		A ₀	A ₁	A ₂	B ₀	B ₁	B ₂	E	H ₁	H ₂	H ₃	H ₄	L ₁	L ₂	L ₃	L ₄	d ₀	D ₀	D ₁	D ₂	Φ	n-ΦS	D ₀	D ₁	D ₂	Φ	n-ΦS
ISA40-6-8-O	Y801-4/0.55	660	460	100	180	350	395	90	180	360	270	400	708	273	167	23	16	Φ40	Φ110	Φ150	45°	4-Φ17.5	Φ32	Φ100	Φ140	45°	4-Φ17.5
-6-7	Y801-4/0.55	660	460	100	180	350	395	90	180	360	270	400	708	273	167	23	16	Φ40	Φ110	Φ150	45°	4-Φ17.5	Φ32	Φ100	Φ140	45°	4-Φ17.5
-5-6	Y801-4/0.55	660	460	100	180	350	395	90	180	360	270	400	708	273	167	23	16	Φ40	Φ110	Φ150	45°	4-Φ17.5	Φ32	Φ100	Φ140	45°	4-Φ17.5
ISA40-6-12-O	Y802-4/0.55	660	460	100	180	350	395	90	180	360	270	400	708	273	167	23	16	Φ40	Φ110	Φ150	45°	4-Φ17.5	Φ32	Φ100	Φ140	45°	4-Φ17.5
-6-11	Y802-4/0.75	660	460	100	180	350	395	90	180	360	270	400	708	273	167	23	16	Φ40	Φ110	Φ150	45°	4-Φ17.5	Φ32	Φ100	Φ140	45°	4-Φ17.5
-6-9	Y801-4/0.55	660	460	100	180	350	395	90	180	360	270	400	708	273	167	23	16	Φ40	Φ110	Φ150	45°	4-Φ17.5	Φ32	Φ100	Φ140	45°	4-Φ17.5
ISA50-12-8-O	Y90S-4/1.1	700	460	120	180	350	395	100	170	370	270	400	733	283	167	23	16	Φ50	Φ125	Φ165	45°	4-Φ17.5	Φ40	Φ110	Φ150	45°	4-Φ17.5
-12-7	Y802-4/0.75	660	460	100	180	350	395	100	170	370	270	400	708	273	167	23	16	Φ50	Φ125	Φ165	45°	4-Φ17.5	Φ40	Φ110	Φ150	45°	4-Φ17.5
-11-6	Y801-4/0.55	660	460	100	180	350	395	100	170	370	270	400	708	273	167	23	16	Φ50	Φ125	Φ165	45°	4-Φ17.5	Φ40	Φ110	Φ150	45°	4-Φ17.5
ISA50-12-12-O	Y90L-4/1.5	700	460	120	180	350	395	100	170	370	270	400	733	283	167	23	16	Φ50	Φ125	Φ165	45°	4-Φ17.5	Φ40	Φ110	Φ150	45°	4-Φ17.5
-12-11	Y90L-4/1.5	700	460	120	180	350	395	100	170	370	270	400	733	283	167	23	16	Φ50	Φ125	Φ165	45°	4-Φ17.5	Φ40	Φ110	Φ150	45°	4-Φ17.5
-11-9	Y802-4/0.75	660	460	100	180	350	395	100	170	370	270	400	708	273	167	23	16	Φ50	Φ125	Φ165	45°	4-Φ17.5	Φ40	Φ110	Φ150	45°	4-Φ17.5
ISA65-20-8-O	Y90L-4/1.5	700	460	120	180	350	395	110	160	380	270	400	758	283	167	23	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
-19-7	Y90L-4/1.5	700	460	120	180	350	395	110	160	380	270	400	733	283	167	23	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
-17-6	Y90S-4/1.1	700	460	120	180	350	395	110	160	380	270	400	733	283	167	23	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
ISA65-20-12-O	Y100L-4/2.2	740	460	140	180	350	395	110	160	380	270	400	803	293	167	23	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
-19-11	Y90L-4/1.5	700	460	120	180	350	395	110	160	380	270	400	758	283	167	23	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
-17-9	Y90L-4/1.5	700	460	120	180	350	395	110	160	380	270	400	758	283	167	23	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
ISA65-20-20-O	Y112M-4/4	890	660	115	200	400	450	120	200	440	320	400	969	352	265	10	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
-19-18	Y100L ₂ -4/3	890	660	115	200	400	450	120	200	440	320	400	947	352	265	10	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
-18-16	Y100L ₂ -4/3	890	660	115	200	400	450	120	200	440	320	400	947	352	265	10	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
-17-14	Y100L ₁ -4/2.2	890	660	115	200	400	450	120	200	440	320	400	947	352	265	10	16	Φ65	Φ145	Φ185	45°	4-Φ17.5	Φ50	Φ125	Φ165	45°	4-Φ17.5
ISA80-32-12-O	Y100L ₂ -4/3	930	660	115	220	400	450	130	190	450	320	400	947	352	265	10	16	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
-30-11	Y100L ₁ -4/2.2	930	660	115	220	400	450	130	190	450	320	400	947	352	265	10	16	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
-28-7	Y100L ₁ -4/2.2	930	660	115	220	400	450	130	190	450	320	400	947	352	265	10	16	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
ISA80-32-16-O	Y100L ₂ -4/3	930	660	115	220	400	450	130	190	450	320	400	947	352	265	10	16	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
-30-14	Y100L ₂ -4/3	930	660	115	220	400	450	130	190	450	320	400	947	352	265	10	16	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
ISA80-32-25-O	Y132S-4/5.5	980	710	120	250	490	540	130	240	500	370	400	1042	372	265	10	20	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
-30-23	Y132S-4/5.5	980	710	120	250	490	540	130	240	500	370	400	1042	372	265	10	20	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
-29-20	Y112M-4/4	980	710	120	250	490	540	130	240	500	370	400	967	372	265	10	20	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
-27-18	Y112M-4/4	980	710	120	250	490	540	130	240	500	370	400	967	352	265	10	20	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
ISA80-50-16-O	Y112M-4/4	930	660	115	220	400	450	130	190	450	320	400	967	352	265	10	16	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5
-48-14	Y112M-4/4	930	660	115	220	400	450	130	190	450	320	400	967	352	265	10	16	Φ80	Φ160	Φ200	22.5°	8-Φ17.5	Φ65	Φ145	Φ185	22.5°	8-Φ17.5



M型布置泵外形及安装尺寸表

Outline and installing dimensions of M type

泵型号 Pump size	电机型号 Motor Size 功率 Power	外形及安装尺寸 Outline & Installing dimensions																进口法兰尺寸 Suction flange dimension					出口法兰尺寸 Discharge flange dimension				
		A ₀	A ₁	A ₂	B ₀	B ₁	B ₂	E	H ₁	H ₂	H ₃	H ₄	L ₁	L ₂	L ₃	L ₄	d ₀	D ₀	D ₁	D ₂	Φ	n-ΦS	D ₀	D ₁	D ₂	Φ	n-ΦS
-45-13	Y100L2-4/3	930	660	115	220	400	450	130	190	450	320	400	947	352	265	10	16	Φ80	Φ160	Φ200	22.5"	8-Φ17.5	Φ65	Φ145	Φ185	22.5"	8-Φ17.5
ISA80-50-25-O	Y132M-4/7.5	980	710	120	250	490	540	130	240	500	370	400	1082	372	265	10	20	Φ80	Φ160	Φ200	22.5"	8-Φ17.5	Φ65	Φ145	Φ185	22.5"	8-Φ17.5
-47-23	Y132M-4/7.5	980	710	120	250	490	540	130	240	500	370	400	1082	372	265	10	20	Φ80	Φ160	Φ200	22.5"	8-Φ17.5	Φ65	Φ145	Φ185	22.5"	8-Φ17.5
-45-20	Y132S-4/5.5	980	710	120	250	490	540	130	240	500	370	400	1042	372	265	10	20	Φ80	Φ160	Φ200	22.5"	8-Φ17.5	Φ65	Φ145	Φ185	22.5"	8-Φ17.5
-42-18	Y132S-4/5.5	980	710	120	250	490	540	130	240	500	370	400	1042	372	265	10	20	Φ80	Φ160	Φ200	22.5"	8-Φ17.5	Φ65	Φ145	Φ185	22.5"	8-Φ17.5
ISA80-50-32-O	Y160M-4/11	1090	780	120	250	490	540	130	240	500	370	400	1082	372	264	11	20	Φ80	Φ160	Φ200	22.5"	8-Φ17.5	Φ65	Φ145	Φ185	22.5"	8-Φ17.5
ISA100-80-16-O	Y132M-4/7.5	1100	740	180	280	490	540	150	250	550	400	400	1164	424	271	34	20	Φ100	Φ180	Φ220	22.5"	8-Φ17.5	Φ80	Φ160	Φ200	22.5"	8-Φ17.5
-77-15	Y132S-4/5.5	1100	740	180	280	490	540	150	250	550	400	400	1124	424	271	34	20	Φ100	Φ180	Φ220	22.5"	8-Φ17.5	Φ80	Φ160	Φ200	22.5"	8-Φ17.5
-74-14	Y132S-4/5.5	1100	740	180	280	490	540	150	250	550	400	400	1124	424	271	34	20	Φ100	Φ180	Φ220	22.5"	8-Φ17.5	Φ80	Φ160	Φ200	22.5"	8-Φ17.5
ISA100-80-20-O	Y132M-4/7.5	1100	740	180	280	490	540	150	250	550	400	400	1164	424	271	34	20	Φ100	Φ180	Φ220	22.5"	8-Φ17.5	Φ80	Φ160	Φ200	22.5"	8-Φ17.5
-77-19	Y132M-4/7.5	1100	740	180	280	490	540	150	250	550	400	400	1164	424	271	34	20	Φ100	Φ180	Φ220	22.5"	8-Φ17.5	Φ80	Φ160	Φ200	22.5"	8-Φ17.5
-74-17	Y132S-4/5.5	1100	740	180	280	490	540	150	250	550	400	400	1124	424	271	34	20	Φ100	Φ180	Φ220	22.5"	8-Φ17.5	Φ80	Φ160	Φ200	22.5"	8-Φ17.5
ISA100-80-25-O	Y160M-4/11	1180	840	160	280	490	540	150	250	550	400	400	1249	454	271	14	20	Φ100	Φ180	Φ220	22.5"	8-Φ17.5	Φ80	Φ160	Φ200	22.5"	8-Φ17.5
-77-23	Y160M-4/11	1180	840	160	280	490	540	150	250	550	400	400	1249	454	271	14	20	Φ100	Φ180	Φ220	22.5"	8-Φ17.5	Φ80	Φ160	Φ200	22.5"	8-Φ17.5
-74-22	Y160M-4/11	1180	840	160	280	490	540	150	250	550	400	400	1249	454	271	14	20	Φ100	Φ180	Φ220	22.5"	8-Φ17.5	Φ80	Φ160	Φ200	22.5"	8-Φ17.5
ISA100-80-32-O	Y160L-4/15	1180	840	160	280	490	540	150	250	550	400	400	1249	454	271	14	20	Φ100	Φ180	Φ220	22.5"	8-Φ17.5	Φ80	Φ160	Φ200	22.5"	8-Φ17.5
-77-30	Y160L-4/15	1180	840	160	280	490	540	150	250	550	400	400	1249	454	271	14	20	Φ100	Φ180	Φ220	22.5"	8-Φ17.5	Φ80	Φ160	Φ200	22.5"	8-Φ17.5
-74-27	Y160M-4/11	1180	840	160	280	490	540	150	250	550	400	400	1249	454	271	14	20	Φ100	Φ180	Φ220	22.5"	8-Φ17.5	Φ80	Φ160	Φ200	22.5"	8-Φ17.5
ISA125-120-16-O	Y132M-4/7.5	1220	760	200	280	520	560	175	225	575	400	400	1184	454	280	105	20	Φ125	Φ210	Φ250	22.5"	8-Φ17.5	Φ100	Φ190	Φ235	22.5"	8-Φ22
-116-15	Y132M-4/7.5	1220	760	200	280	520	560	175	225	575	400	400	1184	454	280	105	20	Φ125	Φ210	Φ250	22.5"	8-Φ17.5	Φ100	Φ190	Φ235	22.5"	8-Φ22
-112-14	Y132M-4/7.5	1160	760	200	280	520	560	175	225	575	400	400	1184	424	280	105	20	Φ125	Φ210	Φ250	22.5"	8-Φ17.5	Φ100	Φ190	Φ235	22.5"	8-Φ22
ISA125-120-20-O	Y160M-4/11	1220	820	200	280	520	560	175	225	575	400	400	1269	454	280	105	20	Φ125	Φ210	Φ250	22.5"	8-Φ17.5	Φ100	Φ190	Φ235	22.5"	8-Φ22
-116-19	Y160M-4/11	1220	820	200	280	520	560	175	225	575	400	400	1269	454	280	105	20	Φ125	Φ210	Φ250	22.5"	8-Φ17.5	Φ100	Φ190	Φ235	22.5"	8-Φ22
-112-17	Y160M-4/11	1220	820	200	280	520	560	175	225	575	400	400	1269	454	280	105	20	Φ125	Φ210	Φ250	22.5"	8-Φ17.5	Φ100	Φ190	Φ235	22.5"	8-Φ22
ISA125-120-25-O	Y160L-4/15	1220	820	200	280	520	560	175	225	575	400	400	1309	454	278	42	20	Φ125	Φ210	Φ250	22.5"	8-Φ17.5	Φ100	Φ190	Φ235	22.5"	8-Φ22
-116-23	Y160L-4/15	1220	820	200	315	520	560	175	225	575	400	400	1309	454	278	42	20	Φ125	Φ210	Φ250	22.5"	8-Φ17.5	Φ100	Φ190	Φ235	22.5"	8-Φ22
-112-22	Y160M-4/11	1220	820	200	315	520	560	175	225	575	400	400	1264	454	278	42	20	Φ125	Φ210	Φ250	22.5"	8-Φ17.5	Φ100	Φ190	Φ235	22.5"	8-Φ22
ISA125-120-32-O	Y180M-4/18.5	1220	820	200	315	520	560	175	225	575	400	400	1334	454	278	42	20	Φ125	Φ210	Φ250	22.5"	8-Φ17.5	Φ100	Φ190	Φ235	22.5"	8-Φ22
-116-30	Y160L-4/15	1220	820	200	315	520	560	175	225	575	400	400	1309	454	278	42	20	Φ125	Φ210	Φ250	22.5"	8-Φ17.5	Φ100	Φ190	Φ235	22.5"	8-Φ22
-112-27	Y160L-4/15	1220	820	200	315	520	560	175	225	575	400	400	1309	454	278	42	20	Φ125	Φ210	Φ250	22.5"	8-Φ17.5	Φ100	Φ190	Φ235	22.5"	8-Φ22
ISA125-120-50-O	Y200L-4/30	1227	877	200	315	520	560	175	235	585	410	400	1439	454	278	42	20	Φ125	Φ210	Φ250	22.5"	8-Φ17.5	Φ100	Φ190	Φ235	22.5"	8-Φ22
ISA150-180-20-O	Y160L-4/15	1280	880	200	315	520	560	200	250	650	450	500	1344	454	280	145	24	Φ150	Φ240	Φ285	22.5"	8-Φ22	Φ125	Φ220	Φ270	22.5"	8-Φ26
-173-18	Y160L-4/15	1280	880	200	315	520	560	200	250	650	450	500	1344	454	280	145	24	Φ150	Φ240	Φ285	22.5"	8-Φ22	Φ125	Φ220	Φ270	22.5"	8-Φ26



M型布置泵外形及安装尺寸表

Outline and installing dimensions of M type

泵型号 Pump size	电机型号 Motor Size 功率 Power	外形及安装尺寸 Outline & Installing dimensions																	进口法兰尺寸 Suction flange dimension					出口法兰尺寸 Discharge flange dimension				
		A ₀	A ₁	A ₂	B ₀	B ₁	B ₂	E	H ₁	H ₂	H ₃	H ₄	L ₁	L ₂	L ₃	L ₄	d ₀	D ₀	D ₁	D ₂	φ	n-ΦS	D ₀	D ₁	D ₂	φ	n-ΦS	
-166-17	Y160M-4/11	1280	880	200	315	570	630	200	250	650	450	500	1299	454	280	145	24	φ150	φ240	φ285	22.5°	8-φ22	φ125	φ220	φ270	22.5°	8-φ26	
-159-15	Y160M-4/11	1280	880	200	315	570	630	200	250	650	450	500	1299	454	280	145	24	φ150	φ240	φ285	22.5°	8-φ22	φ125	φ220	φ270	22.5°	8-φ26	
ISA150-180-25-O	Y180L-4/22	1320	920	200	315	570	630	200	250	650	450	500	1409	454	280	75	24	φ150	φ240	φ285	22.5°	8-φ22	φ125	φ220	φ270	22.5°	8-φ26	
-173-23	Y180M-4/18.5	1320	920	200	315	570	630	200	250	650	450	500	1369	454	280	75	24	φ150	φ240	φ285	22.5°	8-φ22	φ125	φ220	φ270	22.5°	8-φ26	
-166-22	Y180M-4/18.5	1320	920	200	315	570	630	200	250	650	450	500	1369	454	280	75	24	φ150	φ240	φ285	22.5°	8-φ22	φ125	φ220	φ270	22.5°	8-φ26	
ISA150-180-32-O	Y200L-4/30	1360	960	200	315	570	630	200	250	650	450	500	1474	454	280	75	24	φ150	φ240	φ285	22.5°	8-φ22	φ125	φ220	φ270	22.5°	8-φ26	
-173-30	Y200L-4/30	1360	960	200	315	570	630	200	250	650	450	500	1409	454	280	75	24	φ150	φ240	φ285	22.5°	8-φ22	φ125	φ220	φ270	22.5°	8-φ26	
-166-27	Y180L-4/22	1320	920	200	315	570	630	200	250	650	450	500	1409	454	280	75	24	φ150	φ240	φ285	22.5°	8-φ22	φ125	φ220	φ270	22.5°	8-φ26	
ISA150-180-40-O	Y200L-4/30	1360	960	200	315	570	630	200	250	650	450	500	1474	454	280	75	24	φ150	φ240	φ285	22.5°	8-φ22	φ125	φ220	φ270	22.5°	8-φ26	
-173-37	Y200L-4/30	1360	960	200	315	570	630	200	250	650	450	500	1474	454	280	75	24	φ150	φ240	φ285	22.5°	8-φ22	φ125	φ220	φ270	22.5°	8-φ26	
-166-35	Y200L-4/30	1360	960	200	315	570	630	200	250	650	450	500	1474	454	280	75	24	φ150	φ240	φ285	22.5°	8-φ22	φ125	φ220	φ270	22.5°	8-φ26	
ISA150-180-60-O	Y250M-4/55	1558	158	200	315	570	630	200	250	650	450	500	1707	484	280	75	24	φ150	φ240	φ285	22.5°	8-φ22	φ125	φ220	φ270	22.5°	8-φ26	
ISA200-280-25-O	Y200L-4/30	1400	1000	200	350	570	630	200	280	680	480	500	1567	514	285	103	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-270-23	Y200L-4/30	1400	1000	200	350	570	630	200	280	680	480	500	1567	514	285	103	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-260-21	Y180L-4/22	1360	960	200	350	570	630	200	280	680	480	500	1502	514	285	103	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-250-20	Y180L-4/22	1400	1000	200	350	570	630	200	280	680	480	500	1502	514	285	103	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-236-18	Y180M-4/18.5	1400	1000	200	350	570	630	200	280	680	480	500	1462	514	285	103	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
ISA200-280-32-O	Y225S-4/37	1460	1060	200	350	570	630	200	280	680	480	500	1612	544	285	103	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-270-30	Y225S-4/37	1460	1060	200	350	570	630	200	280	680	480	500	1612	544	285	103	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-260-27	Y200L-4/30	1460	1060	200	315	570	630	200	280	680	480	500	1537	514	285	103	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
ISA200-280-40-O	Y250M-4/55	1675	1200	240	400	670	730	200	305	705	505	500	1753.5	544	285	129.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-270-37	Y225M-4/45	1500	1060	220	400	670	730	200	305	705	505	500	1663.5	544	285	129.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-260-35	Y225S-4/37	1500	1060	220	400	670	730	200	305	705	505	500	1638.5	544	285	129.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
ISA200-280-50-O	Y280S-4/75	1675	1200	240	400	670	730	200	305	705	505	500	1818.5	544	285	129.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-270-47	Y280S-4/75	1675	1200	240	400	670	730	200	305	705	505	500	1818.5	544	285	129.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-260-43	Y250M-4/55	1675	1200	240	400	670	730	200	305	705	505	500	1748.5	544	285	129.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
ISA200-400-32-O	Y250M-4/55	1580	1120	230	400	670	730	230	275	735	505	500	1759.5	544	296	129.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-384-30	Y225M-4/45	1500	1060	220	400	670	730	230	275	735	505	500	1674.5	544	296	129.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-368-27	Y225M-4/45	1500	1060	220	400	670	730	230	275	735	505	500	1674.5	544	296	129.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-352-25	Y225S-4/37	1500	1060	220	400	670	730	230	275	735	505	500	1649.5	544	296	129.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-334-22	Y225S-4/37	1500	1060	220	400	670	730	230	275	735	505	500	1649.5	544	296	129.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
ISA200-400-40-O	Y280S-4/75	1690	1200	245	400	670	730	230	300	760	530	500	1829.5	544	296	129.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-386-37	Y280S-4/75	1690	1200	245	400	670	730	230	300	760	530	500	1829.5	544	296	129.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-372-35	Y250S-4/55	1580	1120	230	400	670	730	230	300	760	530	500	1759.5	544	296	129.5	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	





M型布置泵外形及安装尺寸表

Outline and installing dimensions of M type


泵型号 Pump size	电机型号 Motor Size 功率 Power	外形及安装尺寸 Outline & Installing dimensions																进口法兰尺寸 Suction flange dimension					出口法兰尺寸 Discharge flange dimension				
		A ₀	A ₁	A ₂	B ₀	B ₁	B ₂	E	H ₁	H ₂	H ₃	H ₄	L ₁	L ₂	L ₃	L ₄	d ₀	D ₀	D ₁	D ₂	φ	n-ΦS	D ₀	D ₁	D ₂	φ	n-ΦS
ISA200-400-50-O	Y280M-4/90	1690	1200	245	400	670	730	230	300	760	530	500	1879.5	544	296	129.5	24	Φ200	Φ295	Φ340	22.5°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-386-47	Y280S-4/75	1690	1200	245	400	670	730	230	300	760	530	500	1829.5	544	296	129.5	24	Φ200	Φ295	Φ340	22.5°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-372-43	Y280S-4/75	1690	1200	245	400	670	730	230	300	760	530	500	1829.5	544	296	129.5	24	Φ200	Φ295	Φ340	22.5°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
ISA200-400-80-O	Y315M ₂ -4/160	2009	1339	335	400	790	730	230	500	960	730	500	2310	623	402	115	24	Φ200	Φ295	Φ340	22.5°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-630-32	Y280M-4/90	1806	1280	263	430	670	730	250	300	800	550	500	1983	554	400	119	24	Φ250	Φ355	Φ405	22.5°	12-Φ26	Φ200	Φ310	Φ360	15°	12-Φ26
-605-29	Y280S-4/75	1806	1280	263	430	670	730	250	300	800	550	500	1933	554	400	119	24	Φ250	Φ355	Φ405	22.5°	12-Φ26	Φ200	Φ310	Φ360	15°	12-Φ26
-580-27	Y280S-4/75	1806	1280	263	430	670	730	250	300	800	550	500	1933	554	400	119	24	Φ250	Φ355	Φ405	22.5°	12-Φ26	Φ200	Φ310	Φ360	15°	12-Φ26
-556-25	Y250M-4/55	1690	1200	245	430	670	730	250	300	800	550	500	1863	554	400	119	24	Φ250	Φ355	Φ405	22.5°	12-Φ26	Φ200	Φ310	Φ360	15°	12-Φ26
ISA250-630-36-O	Y280M-4/90	1806	1280	263	430	670	730	250	300	800	550	500	1983	554	400	119	24	Φ250	Φ355	Φ405	22.5°	12-Φ26	Φ200	Φ310	Φ360	15°	12-Φ26
ISA250-630-50-O	Y315M ₁ -4/132	2020	1480	270	460	800	860	250	345	845	595	500	2284	606	430	148	24	Φ250	Φ355	Φ405	22.5°	12-Φ26	Φ200	Φ310	Φ360	15°	12-Φ26
-600-45	Y315S-4/110	2020	1480	270	460	800	860	250	345	845	595	500	2234	606	430	148	24	Φ250	Φ355	Φ405	22.5°	12-Φ26	Φ200	Φ310	Φ360	15°	12-Φ26
-560-40	Y280M-4/90	1910	1360	270	460	800	860	250	345	845	595	500	2064	576	430	148	24	Φ250	Φ355	Φ405	22.5°	12-Φ26	Φ200	Φ310	Φ360	15°	12-Φ26
-530-35	Y280S-4/75	1910	1360	270	460	800	860	250	345	845	595	500	2014	576	430	148	24	Φ250	Φ355	Φ405	15°	12-Φ26	Φ200	Φ310	Φ360	15°	12-Φ26
ISA250-630-60-O	Y315M ₂ -4/160	2020	1480	270	460	800	860	250	345	845	595	500	2284	606	430	148	24	Φ250	Φ355	Φ405	15°	12-Φ26	Φ200	Φ310	Φ360	15°	12-Φ26
ISA250-630-80-O	Y355M ₂ -4/250	2299	1500	350	460	840	930	250	480	980	730	400	2650	616	437	252	24	Φ250	Φ355	Φ405	15°	12-Φ26	Φ200	Φ310	Φ360	15°	12-Φ26
ISA300-1000-32-O	Y315S-4/110	2220	1520	350	500	790	852	290	390	970	680	500	2342.5	617	551	124	24	Φ300	Φ410	Φ460	15°	12-Φ26	Φ250	Φ370	Φ425	15°	12-Φ30
-950-28	Y315S-4/110	2220	1520	350	500	790	852	290	390	970	680	500	2342.5	617	551	124	24	Φ300	Φ410	Φ460	15°	12-Φ26	Φ250	Φ370	Φ425	15°	12-Φ30
-890-25	Y280M-4/90	2125	1425	350	500	790	852	290	390	970	680	500	2172	617	551	124	24	Φ300	Φ410	Φ460	15°	12-Φ26	Φ250	Φ370	Φ425	15°	12-Φ30
ISA300-1000-36-O	Y315M ₁ -4/32	2220	1520	350	500	790	852	290	390	970	680	500	2392	617	551	124	24	Φ300	Φ410	Φ460	15°	12-Φ26	Φ250	Φ370	Φ425	15°	12-Φ30
ISA300-1000-50-O	Y315L ₂ -4/200	2210	1540	335	550	790	852	328	402	1058	730	500	2502	616	480	235	30	Φ300	Φ410	Φ460	15°	12-Φ26	Φ250	Φ370	Φ425	15°	12-Φ30
-950-45	Y315L ₁ -4/160	2210	1540	335	550	790	852	328	402	1058	730	500	2432	616	480	235	30	Φ300	Φ410	Φ460	15°	12-Φ26	Φ250	Φ370	Φ425	15°	12-Φ30
-890-40	Y315L ₁ -4/160	2210	1540	335	550	790	852	328	402	1058	730	500	2432	616	480	235	30	Φ300	Φ410	Φ460	15°	12-Φ26	Φ250	Φ370	Φ425	15°	12-Φ30
-840-35	Y315S-4/110	2210	1540	335	550	790	852	328	402	1058	730	500	2402	616	480	235	30	Φ300	Φ410	Φ460	15°	12-Φ26	Φ250	Φ370	Φ425	15°	12-Φ30
ISA300-1000-56-O	Y355M ₂ -4/250	2330	1540	335	550	840	930	328	402	1058	730	500	2747	616	480	235	30	Φ300	Φ410	Φ460	15°	12-Φ26	Φ250	Φ370	Φ425	15°	12-Φ30
ISA350-1600-32-O	Y315L ₁ -4/185	2210	1540	335	600	790	852	335	395	1065	730	500	2500	641	526	162	30	Φ350	Φ470	Φ520	11.25°	12-Φ26	Φ300	Φ430	Φ485	15°	12-Φ30
-1510-28	Y315L ₁ -4/160	2210	1540	335	600	790	852	335	395	1065	730	500	2500	641	526	162	30	Φ350	Φ470	Φ520	11.25°	12-Φ26	Φ300	Φ430	Φ485	15°	12-Φ30
-1410-25	Y315M ₁ -4/132	2210	1540	335	600	790	852	335	395	1065	730	500	2430	641	526	162	30	Φ350	Φ470	Φ520	11.25°	12-Φ26	Φ300	Φ430	Φ485	15°	12-Φ30
ISA350-1600-36-O	Y355M ₂ -4/250	2330	1540	335	600	840	930	335	395	1065	730	500	2745	641	526	162	30	Φ350	Φ470	Φ520	11.25°	12-Φ26	Φ300	Φ430	Φ485	15°	12-Φ30
ISA350-1600-50-O	Y355L ₁ -4/315	2550	1650	400	600	980	1080	330	420	1080	750	600	2857	652	525	280	30	Φ350	Φ470	Φ520	11.25°	12-Φ26	Φ300	Φ430	Φ485	15°	12-Φ30
-1520-45	Y355M ₂ -4/250	2550	1650	400	600	980	1080	330	420	1080	750	600	2857	652	525	280	30	Φ350	Φ470	Φ520	11.25°	12-Φ26	Φ300	Φ430	Φ485	15°	12-Φ30
-1430-40	Y355M ₁ -4/220	2550	1650	400	600	980	1080	330	420	1080	750	600	2857	652	525	280	30	Φ350	Φ470	Φ520	11.25°	12-Φ26	Φ300	Φ430	Φ485	15°	12-Φ30
-1340-35	Y315L ₁ -4/185	2550	1650	400	600	980	1080	330	420	1080	750	600	2627	652	525	280	30	Φ350	Φ470	Φ520	11.25°	12-Φ26	Φ300	Φ430	Φ485	15°	12-Φ30
ISA350-1600-56-O	Y400-4/355 (6KV)	3027	2100	300	600	795	850	330	420	1080	750	600	3702	652	400	405	30	Φ350	Φ470	Φ520	11.25°	12-Φ26	Φ300	Φ430	Φ485	15°	12-Φ30



L 型布置泵外形及安装尺寸图 Outline and installing dimensions of L type

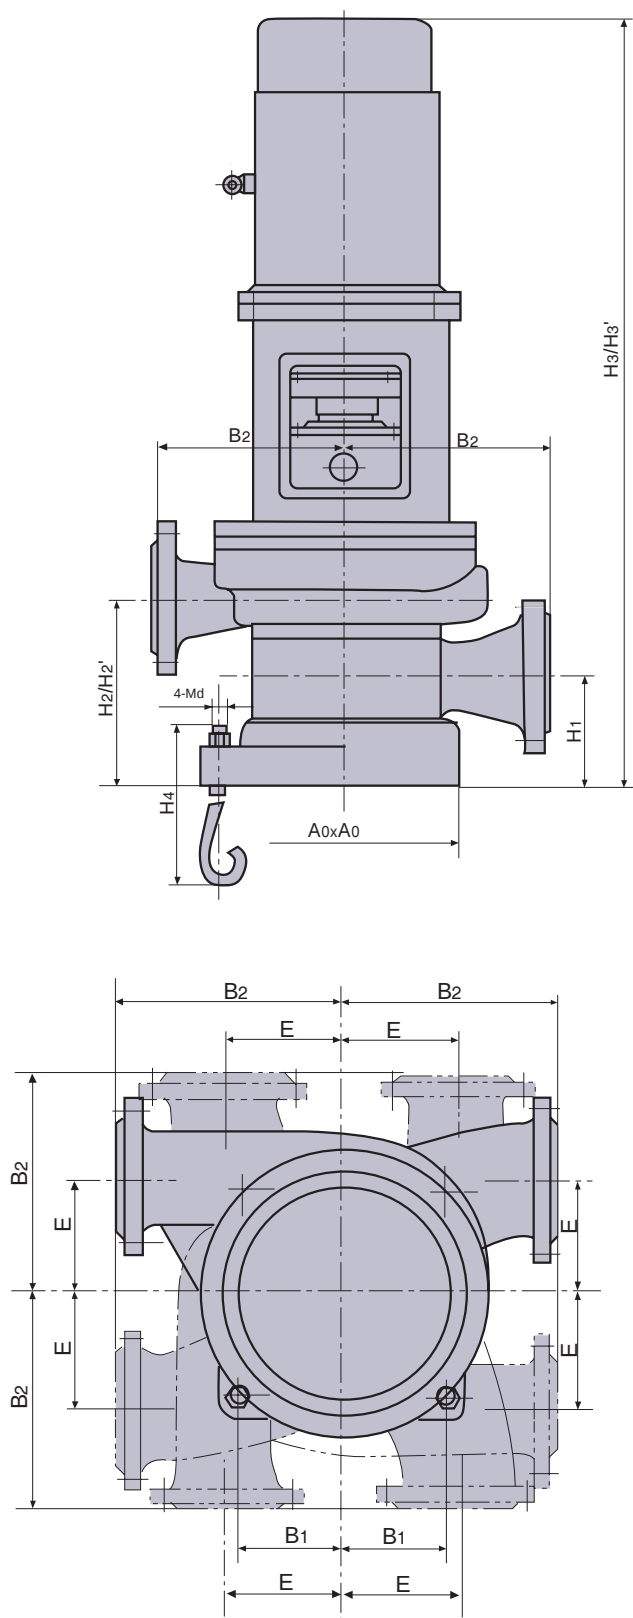

进口法兰
Suction nozzle flange



出口法兰
Discharge nozzle flange

注: 图中H₂'、H₃'尺寸均用于L₄布置。
Note: H₂', H₃' in this drawing apply to installations L₄.

L型布置泵外形及安装尺寸表

Outline and installing dimensions of L type

泵型号 Pump size	电机型号 Motor Size 功率 Power	外形及安装尺寸 Outline & Installing dimensions										进口法兰尺寸 Suction flange dimension					出口法兰尺寸 Discharge flange dimension				
		A ₀	B ₁	B ₂	E	H ₁	$\frac{H_2}{H_2'}$	$\frac{H_3}{H_3'}$	H ₄	d ₀	D ₀	D ₁	D ₂	φ	n-φS	D ₀	D ₁	D ₂	φ	n-φS	
ISA40-6-8-O	Y801-4/0.55	230	92.5	180	90	98	$\frac{182}{-}$	$\frac{700}{-}$	400	16	φ40	φ110	φ150	45°	4-φ17.5	φ32	φ100	φ140	45°	4-φ17.5	
-6-7	Y801-4/0.55	230	92.5	180	90	98	$\frac{182}{-}$	$\frac{700}{-}$	400	16	φ40	φ110	φ150	45°	4-φ17.5	φ32	φ100	φ140	45°	4-φ17.5	
-5-6	Y801-4/0.55	230	92.5	180	90	98	$\frac{182}{-}$	$\frac{700}{-}$	400	16	φ40	φ110	φ150	45°	4-φ17.5	φ32	φ100	φ140	45°	4-φ17.5	
ISA40-6-12-O	Y802-4/0.75	230	92.5	180	90	98	$\frac{182}{-}$	$\frac{700}{-}$	400	16	φ40	φ110	φ150	45°	4-φ17.5	φ32	φ100	φ140	45°	4-φ17.5	
-6-11	Y802-4/0.75	230	92.5	180	90	98	$\frac{182}{-}$	$\frac{700}{-}$	400	16	φ40	φ110	φ150	45°	4-φ17.5	φ32	φ100	φ140	45°	4-φ17.5	
-6-9	Y801-4/0.55	230	92.5	180	90	98	$\frac{182}{-}$	$\frac{700}{-}$	400	16	φ40	φ110	φ150	45°	4-φ17.5	φ32	φ100	φ140	45°	4-φ17.5	
ISA50-12-8-O	Y90S-4/1.1	230	92.5	180	100	98	$\frac{182}{252}$	$\frac{725}{795}$	400	16	φ50	φ125	φ165	45°	4-φ17.5	φ40	φ110	φ150	45°	4-φ17.5	
-12-7	Y802-4/0.75	230	92.5	180	100	98	$\frac{182}{252}$	$\frac{700}{770}$	400	16	φ50	φ125	φ165	45°	4-φ17.5	φ40	φ110	φ150	45°	4-φ17.5	
-11-6	Y801-4/0.55	230	92.5	180	100	98	$\frac{182}{252}$	$\frac{700}{770}$	400	16	φ50	φ125	φ165	45°	4-φ17.5	φ40	φ110	φ150	45°	4-φ17.5	
ISA50-12-12-O	Y90L-4/1.5	230	92.5	180	100	98	$\frac{182}{252}$	$\frac{725}{795}$	400	16	φ50	φ125	φ165	45°	4-φ17.5	φ40	φ110	φ150	45°	4-φ17.5	
-12-11	Y90S-4/1.1	230	92.5	180	100	98	$\frac{182}{252}$	$\frac{725}{795}$	400	16	φ50	φ125	φ165	45°	4-φ17.5	φ40	φ110	φ150	45°	4-φ17.5	
-11-9	Y802-4/0.75	230	92.5	180	100	98	$\frac{182}{252}$	$\frac{700}{770}$	400	16	φ50	φ125	φ165	45°	4-φ17.5	φ40	φ110	φ150	45°	4-φ17.5	
ISA65-20-8-O	Y90L-4/1.5	230	92.5	180	110	105	$\frac{189}{259}$	$\frac{757}{827}$	400	16	φ65	φ145	φ185	45°	4-φ17.5	φ50	φ125	φ165	45°	4-φ17.5	
-19-7	Y90S-4/1.1	230	92.5	180	110	105	$\frac{189}{259}$	$\frac{732}{802}$	400	16	φ65	φ145	φ185	45°	4-φ17.5	φ50	φ125	φ165	45°	4-φ17.5	
-17-6	Y90S-4/1.1	230	92.5	180	110	105	$\frac{189}{259}$	$\frac{732}{802}$	400	16	φ65	φ145	φ185	45°	4-φ17.5	φ50	φ125	φ165	45°	4-φ17.5	
ISA65-20-12-O	Y100L ₁ -4/2.2	230	92.5	180	110	105	$\frac{189}{259}$	$\frac{802}{872}$	400	16	φ65	φ145	φ185	45°	4-φ17.5	φ50	φ125	φ165	45°	4-φ17.5	
-19-11	Y90L-4/1.5	230	92.5	180	110	105	$\frac{189}{259}$	$\frac{757}{827}$	400	16	φ65	φ145	φ185	45°	4-φ17.5	φ50	φ125	φ165	45°	4-φ17.5	
-17-9	Y90L-4/1.5	230	92.5	180	110	105	$\frac{189}{259}$	$\frac{757}{827}$	400	16	φ65	φ145	φ185	45°	4-φ17.5	φ50	φ125	φ165	45°	4-φ17.5	
ISA65-20-20-O	Y112M-4/4	260	110	200	120	134	$\frac{234}{274}$	$\frac{926}{966}$	400	16	φ65	φ145	φ185	45°	4-φ17.5	φ50	φ125	φ165	45°	4-φ17.5	
-19-18	Y100L ₂ -4/3	260	110	200	120	134	$\frac{234}{274}$	$\frac{906}{946}$	400	16	φ65	φ145	φ185	45°	4-φ17.5	φ50	φ125	φ165	45°	4-φ17.5	
-18-16	Y100L ₂ -4/3	260	110	200	120	134	$\frac{234}{274}$	$\frac{906}{946}$	400	16	φ65	φ145	φ185	45°	4-φ17.5	φ50	φ125	φ165	45°	4-φ17.5	
-17-14	Y100L ₁ -4/2.2	260	110	200	120	134	$\frac{234}{274}$	$\frac{906}{946}$	400	16	φ65	φ145	φ185	45°	4-φ17.5	φ50	φ125	φ165	45°	4-φ17.5	
ISA80-32-12-O	Y100L ₁ -4/2.2	260	110	220	130	144	$\frac{264}{304}$	$\frac{936}{976}$	400	16	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
-30-11	Y100L ₁ -4/2.2	260	110	220	130	144	$\frac{264}{304}$	$\frac{936}{976}$	400	16	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
-28-7	Y100L ₁ -4/2.2	260	110	220	130	144	$\frac{264}{304}$	$\frac{936}{976}$	400	16	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
ISA80-32-16-O	Y100L ₁ -4/2.2	260	110	220	130	144	$\frac{264}{304}$	$\frac{936}{976}$	400	16	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
-30-14	Y100L ₁ -4/2.2	260	110	220	130	144	$\frac{264}{304}$	$\frac{936}{976}$	400	16	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
ISA80-32-25-O	Y132S-4/5.5	320	130	250	130	144	$\frac{264}{-}$	$\frac{1031}{-}$	400	20	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
-30-23	Y132S-4/5.5	320	130	250	130	144	$\frac{264}{-}$	$\frac{1031}{-}$	400	20	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
-29-20	Y112M-4/4	320	130	250	130	144	$\frac{264}{-}$	$\frac{956}{-}$	400	20	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
-27-18	Y112M-4/4	320	130	250	130	144	$\frac{264}{-}$	$\frac{956}{-}$	400	20	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
ISA80-50-16-O	Y112M-4/4	260	110	250	130	144	$\frac{264}{304}$	$\frac{956}{976}$	400	16	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
-48-14	Y112M-4/4	260	110	250	130	144	$\frac{264}{304}$	$\frac{956}{976}$	400	16	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	



L型布置泵外形及安装尺寸表

Outline and installing dimensions of L type

泵型号 Pump size	电机型号 Motor Size 功率 Power	外形及安装尺寸 Outline & Installing dimensions										进口法兰尺寸 Suction flange dimension					出口法兰尺寸 Discharge flange dimension				
		A ₀	B ₁	B ₂	E	H ₁	H ₂ H ₂ '	H ₃ H ₃ '	H ₄	d ₀	D ₀	D ₁	D ₂	φ	n-φS	D ₀	D ₁	D ₂	φ	n-φS	
-45-13	Y100L2-4/3	260	110	220	130	144	$\frac{264}{304}$	$\frac{956}{976}$	400	16	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
ISA80-50-25-O	Y132M-4/7.5	320	130	250	130	144	$\frac{264}{-}$	$\frac{1071}{-}$	400	20	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
-47-23	Y132M-4/7.5	320	130	250	130	144	$\frac{264}{-}$	$\frac{1071}{-}$	400	20	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
-45-20	Y132S-4/5.5	320	130	250	130	144	$\frac{264}{-}$	$\frac{1031}{-}$	400	20	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
-42-18	Y132S-4/5.5	320	130	250	130	144	$\frac{264}{-}$	$\frac{1031}{-}$	400	20	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
ISA80-50-32-O	Y160M-4/11	320	130	250	130	144	$\frac{264}{-}$	$\frac{1157}{-}$	400	20	φ80	φ160	φ200	22.5°	8-φ17.5	φ65	φ145	φ185	22.5°	8-φ17.5	
ISA100-80-16-O	Y132M-4/7.5	325	130	280	150	155	$\frac{270}{-}$	$\frac{1129}{-}$	400	20	φ100	φ180	φ220	22.5°	8-φ17.5	φ80	φ160	φ200	22.5°	8-φ17.5	
-77-15	Y132S-4/5.5	325	130	280	150	155	$\frac{270}{-}$	$\frac{1089}{-}$	400	20	φ100	φ180	φ220	22.5°	8-φ17.5	φ80	φ160	φ200	22.5°	8-φ17.5	
-74-14	Y132S-4/5.5	325	130	280	150	155	$\frac{270}{-}$	$\frac{1089}{-}$	400	20	φ100	φ180	φ220	22.5°	8-φ17.5	φ80	φ160	φ200	22.5°	8-φ17.5	
ISA100-80-20-O	Y132M-4/7.5	325	130	280	150	155	$\frac{270}{-}$	$\frac{1129}{-}$	400	20	φ100	φ180	φ220	22.5°	8-φ17.5	φ80	φ160	φ200	22.5°	8-φ17.5	
-77-19	Y132M-4/7.5	325	130	280	150	155	$\frac{270}{-}$	$\frac{1129}{-}$	400	20	φ100	φ180	φ220	22.5°	8-φ17.5	φ80	φ160	φ200	22.5°	8-φ17.5	
-74-17	Y132S-4/5.5	325	130	280	150	155	$\frac{270}{-}$	$\frac{1089}{-}$	400	20	φ100	φ180	φ220	22.5°	8-φ17.5	φ80	φ160	φ200	22.5°	8-φ17.5	
ISA100-80-25-O	Y160M-4/11	325	130	280	150	155	$\frac{270}{-}$	$\frac{1214}{-}$	400	20	φ100	φ180	φ220	22.5°	8-φ17.5	φ80	φ160	φ200	22.5°	8-φ17.5	
-77-23	Y160M-4/11	325	130	280	150	155	$\frac{270}{-}$	$\frac{1214}{-}$	400	20	φ100	φ180	φ220	22.5°	8-φ17.5	φ80	φ160	φ200	22.5°	8-φ17.5	
-74-22	Y160M-4/11	325	130	280	150	155	$\frac{270}{-}$	$\frac{1214}{-}$	400	20	φ100	φ180	φ220	22.5°	8-φ17.5	φ80	φ160	φ200	22.5°	8-φ17.5	
ISA100-80-32-O	Y160L-4/15	325	130	280	150	155	$\frac{270}{-}$	$\frac{1259}{-}$	400	20	φ100	φ180	φ220	22.5°	8-φ17.5	φ80	φ160	φ200	22.5°	8-φ17.5	
-77-30	Y160L-4/15	325	130	280	150	155	$\frac{270}{-}$	$\frac{1259}{-}$	400	20	φ100	φ180	φ220	22.5°	8-φ17.5	φ80	φ160	φ200	22.5°	8-φ17.5	
-74-27	Y160M-4/11	325	130	280	150	155	$\frac{270}{-}$	$\frac{1214}{-}$	400	20	φ100	φ180	φ220	22.5°	8-φ17.5	φ80	φ160	φ200	22.5°	8-φ17.5	
ISA125-120-16-O	Y132M-4/7.5	365	150	280	175	180	$\frac{305}{375}$	$\frac{1164}{1319}$	400	20	φ125	φ210	φ250	22.5°	8-φ17.5	φ100	φ190	φ235	22.5°	8-φ22	
-116-15	Y132M-4/7.5	365	150	280	175	180	$\frac{305}{375}$	$\frac{1164}{1319}$	400	20	φ125	φ210	φ250	22.5°	8-φ17.5	φ100	φ190	φ235	22.5°	8-φ22	
-112-14	Y132M-4/7.5	365	150	280	175	180	$\frac{305}{375}$	$\frac{1164}{1319}$	400	20	φ125	φ210	φ250	22.5°	8-φ17.5	φ100	φ190	φ235	22.5°	8-φ22	
ISA125-120-20-O	Y160M-4/11	365	150	280	175	180	$\frac{305}{375}$	$\frac{1249}{1319}$	400	20	φ125	φ210	φ250	22.5°	8-φ17.5	φ100	φ190	φ235	22.5°	8-φ22	
-116-19	Y160M-4/11	365	150	280	175	180	$\frac{305}{375}$	$\frac{1249}{1319}$	400	20	φ125	φ210	φ250	22.5°	8-φ17.5	φ100	φ190	φ235	22.5°	8-φ22	
-112-17	Y160M-4/11	365	150	280	175	180	$\frac{305}{375}$	$\frac{1249}{1319}$	400	20	φ125	φ210	φ250	22.5°	8-φ17.5	φ100	φ190	φ235	22.5°	8-φ22	
ISA125-120-25-O	Y160L-4/15	365	150	315	175	180	$\frac{300}{-}$	$\frac{1289}{-}$	400	20	φ125	φ210	φ250	22.5°	8-φ17.5	φ100	φ190	φ235	22.5°	8-φ22	
-116-23	Y160L-4/15	365	150	315	175	180	$\frac{300}{-}$	$\frac{1289}{-}$	400	20	φ125	φ210	φ250	22.5°	8-φ17.5	φ100	φ190	φ235	22.5°	8-φ22	
-112-22	Y160M-4/11	365	150	315	175	180	$\frac{300}{-}$	$\frac{1244}{-}$	400	20	φ125	φ210	φ250	22.5°	8-φ17.5	φ100	φ190	φ235	22.5°	8-φ22	
ISA125-120-32-O	Y180M-4/18.5	365	150	315	175	180	$\frac{300}{-}$	$\frac{1314}{-}$	400	20	φ125	φ210	φ250	22.5°	8-φ17.5	φ100	φ190	φ235	22.5°	8-φ22	
-116-30	Y160L-4/15	365	150	315	175	180	$\frac{300}{-}$	$\frac{1289}{-}$	400	20	φ125	φ210	φ250	22.5°	8-φ17.5	φ100	φ190	φ235	22.5°	8-φ22	
-112-27	Y160L-4/15	365	150	315	175	180	$\frac{300}{-}$	$\frac{1289}{-}$	400	20	φ125	φ210	φ250	22.5°	8-φ17.5	φ100	φ190	φ235	22.5°	8-φ22	
ISA125-120-50-O	Y200L-4/30	365	150	315	175	180	$\frac{300}{-}$	$\frac{1418}{-}$	400	20	φ125	φ210	φ250	22.5°	8-φ17.5	φ100	φ190	φ235	22.5°	8-φ22	
ISA150-180-20-O	Y160L-4/15	365	150	315	200	180	$\frac{335}{415}$	$\frac{1324}{1404}$	400	20	φ150	φ240	φ285	22.5°	8φ 22	φ125	φ220	φ270	22.5°	8-φ26	
-173-18	Y160L4/15	365	150	315	200	180	$\frac{335}{415}$	$\frac{1324}{1404}$	400	20	φ150	φ240	φ285	22.5°	8φ 22	φ125	φ220	φ270	22.5°	8-φ26	



L型布置泵外形及安装尺寸表

Outline and installing dimensions of L type

泵型号 Pump size	电机型号 Motor Size 功率 Power	外形及安装尺寸 Outline & Installing dimensions									进口法兰尺寸 Suction flange dimension					出口法兰尺寸 Discharge flange dimension				
		A ₀	B ₁	B ₂	E	H ₁	H ₂ H ₂ '	H ₃ H ₃ '	H ₄	d ₀	D ₀	D ₁	D ₂	φ	n-Φs	D ₀	D ₁	D ₂	φ	n-Φs
-166-17	Y160M-4/11	365	150	315	200	180	335 415	1279 1359	400	20	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
-159-15	Y160M-4/11	365	150	315	200	180	335 415	1279 1359	400	20	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
ISA150-180-25-O	Y180L-4/22	365	150	315	200	180	335 415	1389 1359	400	20	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
-173-23	Y180M-4/18.5	365	150	315	200	180	335 415	1349 1429	400	20	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
-166-22	Y180M-4/18.5	365	150	315	200	180	335 415	1349 1429	400	20	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
ISA150-180-32-O	Y200L-4/30	420	170	315	200	190	335 415	1454 1534	500	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
-173-30	Y200L-4/30	420	170	315	200	190	335 415	1456 1534	500	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
-166-27	Y180L-4/22	420	170	315	200	190	335 415	1389 1469	500	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
ISA150-180-40-O	Y200L-4/30	420	170	315	200	190	335 415	1454 1534	500	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
-173-37	Y200L-4/30	420	170	315	200	190	335 415	1454 1534	500	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
-166-35	Y200L-4/30	420	170	315	200	190	335 415	1454 1534	500	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
ISA150-180-60-O	Y250M-4/55	420	170	315	200	190	335 412	1369 1466	500	24	Φ150	Φ240	Φ285	22.5°	8-Φ22	Φ125	Φ220	Φ270	22.5°	8-Φ26
ISA200-280-25-O	Y200L-4/30	420	170	350	200	200	380 430	1634 1684	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-270-23	Y200L-4/30	420	170	350	200	200	380 430	1634 1684	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-260-21	Y180L-4/22	420	170	350	200	200	380 430	1554 1604	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-250-20	Y180L-4/22	420	170	350	200	200	380 430	1554 1604	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-236-18	Y180M-4/18.5	420	170	350	200	200	380 430	1514 1564	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
ISA200-280-32-O	Y225S-4/37	420	170	350	200	200	380 430	1694 1744	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-270-30	Y225S-4/37	420	170	350	200	200	380 430	1694 1744	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-260-27	Y200L-4/30	420	170	350	200	200	380 430	1619 1669	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
ISA200-280-40-O	Y250M-4/55	530	220	400	200	226	406 -	1835 -	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-270-37	Y225M-4/45	530	220	400	200	226	406 -	1745 -	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-260-35	Y225S-4/37	530	220	400	200	226	406 -	1720 -	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
ISA200-280-50-O	Y280S-4/75	530	220	400	200	226	406 -	1930 -	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-270-47	Y280S-4/75	530	220	400	200	226	406 -	1930 -	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-260-43	Y250M-4/55	530	220	400	200	226	406 -	1845 -	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
ISA200-400-32-O	Y250M-4/55	530	220	400	230	226	417 -	1856 -	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-384-30	Y225M-4/45	530	220	400	230	226	417 -	1756 -	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-368-27	Y225M-4/45	530	220	400	230	226	417 -	1756 -	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-352-25	Y225S-4/37	530	220	400	230	226	417 -	1731 -	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-334-22	Y225S-4/37	530	220	400	230	226	417 -	1731 -	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
ISA200-400-40-O	Y280S-4/75	530	220	400	230	226	417 -	1941 -	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-386-37	Y280S-4/75	530	220	400	230	226	417 -	1941 -	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26
-372-35	Y250M-4/55	530	220	400	230	226	417 -	1856 -	500	24	Φ200	Φ295	Φ340	15°	12-Φ22	Φ150	Φ250	Φ300	22.5°	8-Φ26



L型布置泵外形及安装尺寸表

Outline and installing dimensions of L type

泵型号 Pump size	电机型号 Motor Size 功率 Power	外形及安装尺寸 Outline & Installing dimensions										进口法兰尺寸 Suction flange dimension					出口法兰尺寸 Discharge flange dimension				
		A ₀	B ₁	B ₂	E	H ₁	H ₂ H ₂ '	H ₃ H ₃ '	H ₄	d ₀	D ₀	D ₁	D ₂	φ	n-φS	D ₀	D ₁	D ₂	φ	n-φS	
ISA200-400-50-O	Y7280M-4/90	530	220	400	230	226	417 -	1991 -	500	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-386-47	Y7280S-4/75	530	220	400	230	226	417 -	1941 -	500	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
-372-43	Y7280S-4/75	530	220	400	230	226	417 -	1941 -	500	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	8-φ26	
ISA200-400-80-O	Y315M ₂ -4/160	650	280	400	230	292	552	2315	500	24	φ200	φ295	φ340	15°	12-φ22	φ150	φ250	φ300	22.5°	12-φ26	
-630-32	Y280M-4/90	530	220	430	230	254	524	1988	500	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26	
-605-29	Y280S-4/75	530	220	430	230	254	524	1938	500	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26	
-580-27	Y280S-4/75	530	220	430	230	254	524	1938	500	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26	
-556-25	Y250M-4/55	530	220	430	230	254	524	1868	500	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26	
ISA250-630-36-O	Y280M-4/90	530	220	430	250	254	524	1998	500	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26	
ISA250-630-50-O	Y315M ₁ -4/132	650	280	460	250	300	600	2426	500	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26	
-600-45	Y315S-4/110	650	280	460	250	300	600	2376	500	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26	
-560-40	Y280M-4/90	650	280	460	250	300	600	2206	500	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26	
-530-35	Y250S-4/75	650	280	460	250	300	600	2156	500	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26	
ISA250-630-60-O	Y315M ₂ -4/160	650	280	460	250	300	600	2426	500	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ26	
ISA250-630-80-O	Y355M ₂ -4/250	840	380	460	250	389	776	2812	400	24	φ250	φ355	φ405	15°	12-φ26	φ200	φ310	φ360	15°	12-φ30	
ISA300-1000-32-O	Y315S-4/110	840	285	500	290	345	724	2511	500	24	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30	
-950-28	Y315S-4/110	840	285	500	290	345	724	2511	500	24	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30	
-890-25	Y280M-4/90	840	285	500	290	345	724	2541	500	24	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30	
ISA300-1000-36-O	Y315M ₁ -4/132	840	285	500	290	345	724	2561	500	24	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30	
ISA300-1000-50-O	Y315L ₂ -4/200	840	380	550	328	418	807	2593	500	30	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30	
-950-45	Y315L ₁ -4/160	840	380	550	328	418	807	2523	500	30	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30	
-890-40	Y315L ₁ -4/160	840	380	550	328	418	807	2523	500	30	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30	
-840-35	Y315S-4/110	840	380	550	328	418	807	2473	500	30	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30	
ISA300-1000-56-O	Y355M ₂ -4/250	840	380	550	328	418	807	2723	500	30	φ300	φ410	φ460	15°	12-φ26	φ250	φ370	φ425	15°	12-φ30	
ISA350-1600-32-O	Y315L-4/185	665	285	600	335	355	731	2662	500	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	11.25°	16-φ30	
-1510-28	Y315L ₁ -4/160	665	285	600	335	355	731	2662	500	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	11.25°	16-φ30	
-1410-25	Y315M ₁ -4/132	665	285	600	335	355	731	2592	500	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	11.25°	16-φ30	
ISA350-1600-36-O	Y355M ₂ -4/250	665	285	600	335	355	731	2792	500	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	11.25°	16-φ30	
ISA350-1600-50-O	Y355L ₁ -4/315	990	435	600	330	435	835	2992	600	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	11.25°	16-φ30	
-1520-45	Y355M ₂ -4/250	990	435	600	330	435	835	2992	600	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	11.25°	16-φ30	
-1430-40	Y355M ₁ -4/220	990	435	600	330	435	835	2992	600	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	11.25°	16-φ30	
-1340-35	Y315L-4/185	990	435	600	330	435	835	2992	600	30	φ350	φ470	φ520	11.25°	16-φ26	φ300	φ430	φ485	11.25°	16-φ30	

本型录内容如有变更，恕不另行通知。

We reserve the right to change content without notice.

